

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 October 2001 (18.10.2001)

PCT

(10) International Publication Number
WO 01/76438 A1

(51) International Patent Classification⁷: **A47K 10/38**,
10/42

(21) International Application Number: PCT/US01/11447

(22) International Filing Date: 6 April 2001 (06.04.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/545,995 10 April 2000 (10.04.2000) US
09/565,227 4 May 2000 (04.05.2000) US
09/659,284 12 September 2000 (12.09.2000) US

(71) Applicant: **KIMBERLY CLARK WORLDWIDE, INC.**
[US/US]; 401 North Lake Street, Neenah, WI 54956 (US).

(72) Inventors: **FAULKS, Michael, John**; 2320 Fiesta Court,
Neenah, WI 54956 (US). **PELUSO, John, Eugene**; Apartment
304, 405 S. Olde Oneida Street, Appleton, WI 54911
(US). **VELASQUEZ, Herb, F.**; 3142 Westfield Ridge,
Neenah, WI 54956 (US). **NEWMAN, William, Robert**;


807 Louise Road, Neenah, WI 54956 (US). **HUANG, Yung, Hsiang**; 2420 West Seneca Drive, Appleton, WI 54914 (US). **DELLERMAN, Paige, Annette**; 1354 west Harris Street, Appleton, WI 54914 (US). **ROMME, Steven, John**; 3409 Brooks Road, Oshkosh, WI 54904 (US). **SCHULTZ, Walter, Theodore**; N9650 Shepherd Lane, Appleton, WI 54915 (US). **RIVERA, Ligia, A.**; 1900 North McCarthy Road, Appleton, WI 54913 (US). **LANG, Frederick, J.**; 1541 Whitetail Drive, Neenah, WI 54956 (US). **LARSON, Jennifer, Cappel**; 1545 Maricopa Drive, Oshkosh, WI 54904 (US). **LINDSAY, Jeff**; 20 Diane Lane, Appleton, WI 54915 (US). **BOCHMANN, Cherry, A.**; 1906 East 120th Street, Cleveland, OH 44106 (US). **DEGREEN, Gerald, P.**; 5569 Mayfield Road, Windsor, OH 44099 (US). **SAUNDERS, Craig, Martin**; 21471 Aberdeen Road, Rocky River, OH 44116 (US). **KALMAN, Jeffery, M.**; 1849 Cadwell Avenue, Cleveland Heights, OH 44118 (US).

(74) Agent: **BELVIS, Glen, P.**; Brinks Hofer Gilson & Lione,
P.O. Box 10087, Chicago, IL 60610 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

[Continued on next page]

(54) Title: METHOD FOR DISPENSING WET WIPES

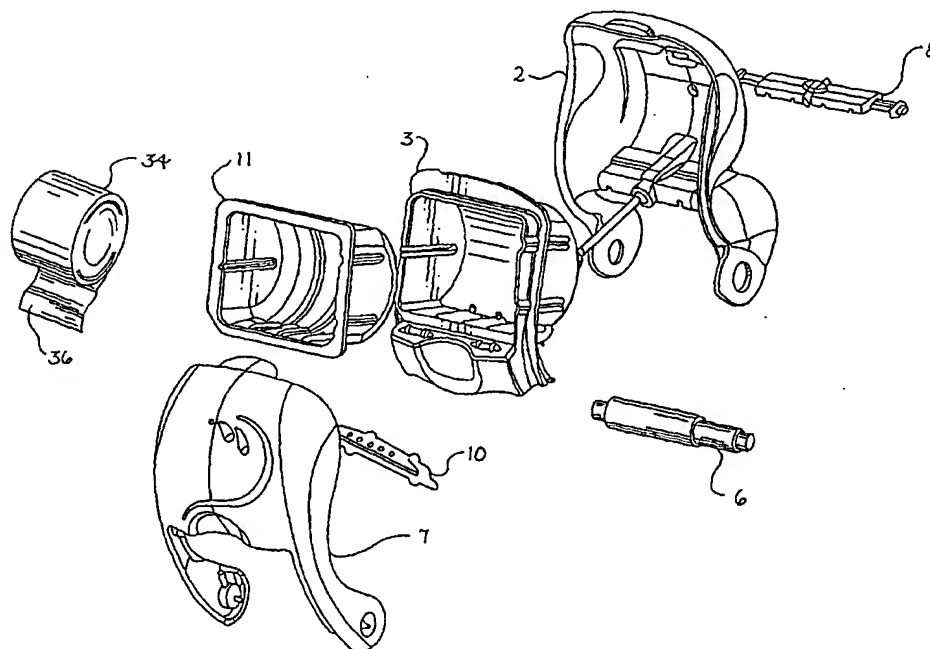

(57) Abstract: There is provided a method for dispensing wet wipes. The method may include mounting a dispenser, inserting a container of wet wipes, threading the wipes through the dispenser, and separating a portion of wipes. The container may have the ability to be inserted into the dispenser in a preselected manner based on the desired orientation of the wipes contained therein.



WO 01/76438 A1



CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METHOD FOR DISPENSING WET WIPES

This application is a continuation in part of pending U.S. application entitled System and Dispenser for Dispensing Wet Wipes, Serial No. 09/565,227, attorney docket no. 659/648 filed May 4, 2000, which is a
5 continuation in part of pending U.S. application entitled Dispenser For Premoistened Wipes, Serial No. 09/545,995, attorney docket no. 659/623, which was filed on April 10, 2000, the disclosures of which are hereby incorporated by reference.

10 FIELD OF THE INVENTION

This invention relates to the use of wet or premoistened products alone or in conjunction with other products or systems to dispense such products.

BACKGROUND OF THE INVENTION

15 Wet products such as wet wipes have many applications. They may be used with small children and infants when changing diapers, they may be used for household cleaning tasks, they may be used for cleaning hands, they may be used as a bath tissue, they may be used as by a caregiver to clean a disabled or incontinent adult, or they may be used in and for a whole host of
20 other applications, where it is advantages to have a wipe or towel that has some wetness or moisture in it.

Wet wipes have been traditionally dispensed in sheet form from a tub like container with a hinged lid on the top. The lid is opened and individual or singularized sheets of the wipes are removed. Another type of container that
25 has been used for wet wipes provides a roll of wipes in which the wipes are pulled from the top of the container in a direction that is parallel to the axis of the roll. These wipes are pulled from the center of a hollow coreless roll that has perforated sheets. These containers generally have a snap top lid that is opened to expose a piece of the wipes that can then be pulled to remove the

desired amount of wipes. Once pulled out the wipes can then be torn off, usually at a perforation, and the lid closed.

Wet wipes can be any wipe, towel, tissue or sheet like product including natural fibers, synthetic fibers, synthetic material and combinations thereof, that is wet or moist or becomes wet during use or prior to use. Wet
5 wipes may be dispersible when in contact with water or may be non-dispersible. Examples of wet wipes are disclosed in application serial numbers 09/564,449; 09/564,213; 09/565,125; 09/564,837; 09/564,939; 09/564,531; 09/564,268; 09/564,424; 09/564,780; 09/564,212; 09/565,623 all
10 filed May 4, 2000, and application serial no. 09/223,999 entitled Ion-Sensitive Hard Water Dispersible Polymers And Applications Therefore, filed December 31, 1998 the disclosures of which are incorporated herein by reference. Embodiments of dispensers are described in application serial number _____ filed September 12, 2000, having lawyer docket number
15 659/691, the disclosure of which is incorporated herein by reference.

SUMMARY OF THE INVENTION

In an embodiment of the invention there is provided a method for dispensing wet wipes comprising: removing a spindle from a toilet tissue dispenser; mounting a wet wipes dispenser in the toilet tissue dispenser, the
20 wet wipes dispenser having an opening; securing the wipes dispenser to the toilet tissue dispenser and at least one surface such that the wipes dispenser does not move substantially during use; inserting a container of wet wipes; threading the wipes through the wipes dispenser opening; and removing wet wipes from the wipes dispenser.

These embodiments may further comprise engaging the wet wipes
25 dispenser with the posts of the toilet tissue dispenser by means of a mounting assembly; and/or applying pressure to the posts of the toilet tissue dispenser and the at least one surface by adjusting a screw in a mounting assembly. The wipes dispenser may be rigidly, removably, and adjustably secured to the
30 toilet tissue dispenser and at least one surface; the securing may be such that the wipes dispenser does not substantially move over a period of 10 minutes

when subjected to a force of at least 500 g, to a force of at least 800 g, and/or to a force of at least 1100 g.

In an embodiment of the invention there is provided a method for dispensing wet wipes comprising: removing a spindle from a toilet tissue dispenser; mounting a wet wipes dispenser in the toilet tissue dispenser by
5 means of a mounting assembly, the mounting assembly having arms and a screw, the wet wipes dispenser having an opening; inserting a container of wet wipes; threading the wipes through the wipes dispenser opening; and removing wet wipes from the wipes dispenser.

10 These embodiments may further comprise the method wherein the arms and screw are adjustable; wherein the screw passes through the body of the mounting assembly perpendicular to the direction of motion of the arms; wherein the mounting comprises engaging the arms of the mounting assembly with the posts of the toilet tissue dispenser; wherein the mounting
15 comprises adjusting the screw in the mounting assembly such that pressure is applied to the posts of the toilet tissue dispenser and at least one surface; wherein the wipes dispenser is rigidly, removably, and adjustably secured to the toilet tissue dispenser and at least one surface; and/or wherein the mounting is such that the wipes dispenser does not substantially move over a
20 period of 10 minutes when subjected to a force of at least 500 g, to a force of at least 800 g, and/or to a force of at least 1100 g.

In an embodiment of the invention there is provided a method for dispensing wet wipes comprising: removing a spindle from a toilet tissue dispenser; securing a wet wipes dispenser to the toilet tissue dispenser and at
25 least one surface by means of a screw in a mounting assembly, the wet wipes dispenser having an opening; inserting a container of wet wipes; threading the wipes through the wipes dispenser opening; and removing wet wipes from the wipes dispenser.

30 These embodiments may further comprise the method wherein the securing comprises applying pressure to the posts of the toilet tissue dispenser and the at least one surface by adjusting the screw in the mounting assembly; a thread design that requires 6 turns to move the screw a distance

of 1 inch through the mounting assembly; the screw comprises a large head; and/or the securing is such that the wipes dispenser does not substantially move over a period of 10 minutes when subjected to a force of at least 500 g, to a force of at least 800 g, and/or to a force of at least 1100 g.

5 In an embodiment of the invention there is provided a method for dispensing wet wipes comprising: removing a spindle from a toilet tissue dispenser; mounting a wet wipes dispenser in the toilet tissue dispenser by means of a mounting assembly, the wet wipes dispenser having an opening; inserting a container of wet wipes; threading the wipes through the wipes
10 dispenser opening; and removing wet wipes from the wipes dispenser.

 These embodiments may further comprise the method wherein the container of wet wipes is removed from a plurality of containers; wherein the container comprises a cover that is at least partially removable; wherein the wet wipes dispenser comprises guides and a dispenser cover; wherein the
15 threading comprises placing one end of the wipes on the guides and closing the dispenser cover; wherein the dispenser comprises recesses; wherein the removing comprises grasping the wipe in the area exposed by the recesses; and/or wherein the removing comprises separating the wipes at perforations.

 In an embodiment of the invention there is provided a method for
20 dispensing wet wipes comprising: removing a spindle from a toilet tissue dispenser; mounting a wet wipes dispenser in the toilet tissue dispenser by means of a mounting assembly, the wet wipes dispenser having wet wipes and an opening; and removing wet wipes from the dispenser.

 In an embodiment of the invention there is provided a method for
25 dispensing wet wipes comprising: removing a spindle from a toilet tissue dispenser; mounting a wet wipes dispenser in the toilet tissue dispenser by means of a mounting assembly; the wet wipes dispenser comprising an interior, an opening, guides, a cover, and a wiper blade; opening a container of wet wipes, the container having a wipes cover; inserting a container of wet
30 wipes into the wet wipes dispenser; threading the wipes through the dispenser opening; and removing wet wipes from the dispenser.

These embodiments may further comprise the method wherein the wipes dispenser is rigidly, removably, and adjustably secured to the toilet tissue dispenser and at least one surface; wherein the opening the container comprises removing the wipes cover from the container; wherein the opening the container comprises removing a strip from the wipes cover; wherein the inserting comprises placing the container inside the interior of the wet wipes dispenser; wherein the inserting comprises matching the shape of the container to the shape of the interior of the wet wipes dispenser; wherein the threading comprises closing the dispenser cover; wherein the threading comprises placing one end of the wipe between the guides and a wiper blade, the wiper blade being attached to the dispenser cover; wherein the removing comprises pulling the wipe between the guides and the wiper blade; and/or wherein the removing comprises separating the wipes at perforations.

In an embodiment of the invention there is provided a method for dispensing wet wipes comprising: removing a spindle from a toilet tissue dispenser; mounting a wet wipes dispenser in the toilet tissue dispenser by means of a mounting assembly, the wet wipes dispenser having an opening and wet wipes; securing the wipes dispenser to the toilet tissue dispenser and at least one surface by means of a screw in the mounting assembly such that the wipes dispenser does not move substantially during use; and removing wet wipes from the wipes dispenser.

In an embodiment of the invention there is provided a method for dispensing wet wipes comprising: mounting a wet wipes dispenser in a toilet tissue dispenser such that the wipes dispenser does not move substantially during use, the wet wipes dispenser having an opening; inserting a container of wet wipes; threading the wipes through the wipes dispenser opening; and removing wet wipes from the wipes dispenser.

In an embodiment of the invention there is provided a method for dispensing wet wipes comprising: mounting a wet wipes dispenser in the toilet tissue dispenser by means of a mounting assembly, the wet wipes dispenser having wet wipes; securing the wipes dispenser to the toilet tissue dispenser

and at least one surface by means of a screw in the mounting assembly; and removing wet wipes from the wipes dispenser.

5 In an embodiment of the invention there is provided a method for dispensing wet wipes comprising: securing a wet wipes dispenser to a toilet tissue dispenser by applying pressure to the posts of the toilet tissue dispenser and at least one surface by adjusting a screw in a mounting assembly; inserting a container of wet wipes; and removing wet wipes from the wipes dispenser.

10 In an embodiment of the invention there is provided a method for dispensing wet wipes comprising: attaching a wet wipes dispenser to a surface such that the wipes dispenser does not move substantially during use, the wet wipes dispenser having an opening; inserting a container of wet wipes; threading the wipes through the wipes dispenser opening; and removing wet wipes from the wipes dispenser.

15 These embodiments may further comprise the method wherein the attaching is accomplished through the use of at least one fastener; wherein the attaching is accomplished through the use of at least one adhesive; wherein the attaching is accomplished through the use of magnetic attachments; wherein the attaching is accomplished through the use of engaging brackets; and/or wherein the attaching is such that the wipes dispenser does not substantially move over a period of 10 minutes when
20 subjected to a force of at least 500 g, to a force of at least 800 g, and/or to a force of at least 1100 g.

25 In an embodiment of the invention there is provided a method for dispensing wet wipes comprising: attaching a wet wipes dispenser to a surface such that the wipes dispenser does not move substantially during use, the wet wipes dispenser comprising an opening, guides, and a dispenser cover; inserting a container of wet wipes; threading the wipes through the wipes dispenser opening; and removing wet wipes from the wipes dispenser.

30 In an embodiment of the invention there is provided a method for dispensing wet wipes comprising: attaching a wet wipes dispenser to a surface, the wet wipes dispenser comprising an interior, an opening, guides, a

cover, and a wiper blade; opening a container of wet wipes, the container having a wipes cover; inserting a container of wet wipes into the wet wipes dispenser; threading the wipes through the dispenser opening; and removing wet wipes from the dispenser.

5 These embodiments may further comprise the method wherein the wipes are contained in a cartridge having a specific orientation, the cartridge having a lower side wall; wherein the lower side wall is at an angle of between about 100 degrees and 170 degrees from the vertical axis of the mounted wet
10 wipes dispenser; wherein the cartridge fits into the wet wipes dispenser in only one orientation; wherein the inserting comprises placing the container inside the interior of the wet wipes dispenser; wherein the inserting comprises matching the shape of the container to the shape of the interior of the wet
15 wipes dispenser; wherein the opening the container comprises removing the wipes cover from the container; wherein the opening the container comprises removing a strip from the wipes cover; wherein the threading comprises
20 closing the dispenser cover; wherein the threading comprises placing one end of the wipe between the guides and a wiper blade, the wiper blade being attached to the dispenser cover; wherein the removing comprises pulling the
 wipe between the guides and the wiper blade; and/or wherein the removing
 comprises separating the wipes at perforations.

 In an embodiment of the invention there is provided a method for dispensing wet wipes comprising: attaching a wet wipes dispenser to a surface such that the wipes dispenser does not move substantially during use, the wet wipes dispenser comprising wet wipes, an opening, and a moisture
25 barrier means; pulling the wet wipes through the moisture barrier means; and removing wet wipes from the dispenser.

 In an embodiment of the invention there is provided a method for dispensing wet wipes comprising: attaching a wet wipes dispenser to a surface such that the wipes dispenser does not move substantially during use, the wet wipes dispenser comprising an opening and a moisture barrier
30 means; inserting a container of wet wipes into the dispenser; pulling the wet

wipes through the moisture barrier means; and removing wet wipes from the dispenser.

5 In an embodiment of the invention there is provided a method for dispensing wet wipes comprising: mounting a wet wipes dispenser in a toilet tissue dispenser by means of a mounting assembly such that the mounting assembly and dispenser together exert pressure on the posts of the toilet tissue dispenser and on at least one surface.

10 In an embodiment of the invention there is provided a method for dispensing wet wipes comprising: removing a spindle from a toilet tissue dispenser; mounting a wet wipes dispenser in the toilet tissue dispenser by means of a mounting assembly, the dispenser having a movable tray, the mounting assembly having a screw; moving the tray such that the screw is uncovered; and adjusting the screw in the mounting assembly such that the wipes dispenser is secured to the toilet tissue dispenser and at least one surface.

15 In an embodiment of the invention there is provided a method for dispensing wet wipes comprising: mounting a wet wipes dispenser in the toilet tissue dispenser by means of a mounting assembly, the wet wipes dispenser having wet wipes and a tray, the mounting assembly having a screw; moving the tray such that the screw is uncovered; securing the wipes dispenser to the toilet tissue dispenser and at least one surface by means of the screw; repositioning the tray in the dispenser; and removing wet wipes from the wipes dispenser.

20 In an embodiment of the invention there is provided a method for dispensing wet wipes comprising: mounting a wet wipes dispenser in a toilet tissue dispenser such that the wipes dispenser does not move substantially during use, the wet wipes dispenser having an opening, the wet wipes dispenser having a dispensing force; selecting a package of wet wipes such that the tensile strength of the wet wipes is at least twice that of the dispensing force; inserting the package of wet wipes; threading the wipes through the wipes dispenser opening; and removing wet wipes from the wipes dispenser. These embodiments may further comprise the method wherein the

25

30

tensile strength of the wipes is at least five times that of the dispensing force and/or at least seven times that of the dispensing force.

5 In an embodiment of the invention there is provided a method for dispensing wet wipes comprising: mounting a wet wipes dispenser in a toilet tissue dispenser such that the wipes dispenser does not move substantially during use, the wet wipes dispenser having an opening, the wet wipes dispenser having a dispensing force; selecting a package of perforated wet wipes such that the detach strength of the wet wipes is at least five times that of the dispensing force; inserting the package of wet wipes; threading the
10 wipes through the wipes dispenser opening; and removing wet wipes from the wipes dispenser. These embodiments may further comprise the method wherein the detach strength of the wipes is at least seven times that of the dispensing force.

DRAWINGS

15 Figure 1 is a perspective view of a dispenser.
Figure 2 is an exploded view of a dispenser and cartridge.
Figure 2a is a plan view of a portion of the front of the tray.
Figure 3 is a perspective view of an open dispenser.
Figure 4 is a top view of a dispenser.
20 Figure 5 is a front view of a dispenser.
Figure 6 is a bottom view of a dispenser.
Figure 7 is a side view of a dispenser.
Figure 8 is a back view of a dispenser.
Figure 9 is a cross section view of a dispenser and cartridge taken
25 along line A-A of Figure 5.
Figure 10 is a cross section view along line D-D of Figure 9.
Figure 11 is a cross section view along line E-E of Figure 9.
Figure 12 is a cross section view along line F-F of Figure 9.
Figure 13 is a cross section view of a dispenser and cartridge taken
30 along line C-C of Figure 5.
Figure 14 is a cross section view along line J-J of Figure 13.

Figure 15 is a cross section view along line K-K of Figure 13.

Figure 16 is a perspective view of a dispenser with a wet wipe.

Figure 17 is a perspective view of a dispenser, a cartridge and a roll of wet wipes.

5 Figure 18 is a perspective view of a roll of wet wipes

Figure 19 is a cross section view of a dispenser, a cartridge and a roll of wet wipes.

Figure 20 is a cross section view of a cartridge and a roll of premoistened wipes.

10 Figure 21 is a cross section view of a cartridge.

Figure 22 is a perspective view of the outside of a cover.

Figure 23 is a front view of the outside of a cover.

Figure 24 is a perspective view of the inside of a cover.

Figure 25 is a cross section view of a cover.

15 Figures 26-28 are views of a tray.

Figures 29-31 are views of a roller.

Figures 32-37 are views of a wiper assembly.

Figure 36 is a view along line A-A of Figure 35.

Figure 34 is a view along line A-A of Figure 32.

20 Figures 38-39 are views of a wiper.

Figures 40-41 are views of a roller.

Figures 42-45 are views of a mounting assembly.

Figures 46-50 are views of a screw used in conjunction with the mounting assembly.

25 Figures 51-53 are views of a cartridge.

Figure 54 is a top view of a package of cartridges.

Figure 55 is a perspective view of a dispenser.

Figure 56 is an exploded view of a dispenser and cartridge.

Figure 57 is a front plan view of a wiper assembly.

30 Figure 58 is a front plan view of a wiper assembly.

Figure 59 is a plan view of a wiper blade.

Figure 60 is a cross-sectional view of a wiper blade.

Figure 61 is a perspective view of a wiper blade.

Figure 62 is a cross-sectional view of a dispenser.

Figure 63 is a cross-sectional view of a portion of a dispenser.

Figure 64 is a perspective view of the inside of a cover.

5 Figure 65 is a top view of the inside of a cover.

Figure 66 is a view of a conventional bath tissue holder.

Figure 67 is a view of a conventional bath holder.

Figure 68 is a view of a mounting assembly in a conventional bath tissue holder (shown without the dispenser).

10 DETAILED DESCRIPTION OF PRESENTLY PREFERRED EMBODIMENTS OF THE INVENTION

A system and method for dispensing and providing wipes is provided, which in general may have a housing, a cover, and a cartridge having a roll of wet wipes. The cartridge is placed in the housing and then the wipes can be removed from the dispenser.

15 In general there is provided a device for mounting a wet wipes dispenser to another surface. That surface may be, by way of example, a wall in a bathroom, a kitchen wall, or a bathroom vanity wall. The device may be used with, or adapted for use with, most any type of wet wipes dispenser, such as the various dispensers illustrated and disclosed herein. The device is ideally adapted to work in conjunction with a conventional bath tissue holder to permit a dispenser to be securely, yet removably attached to the wall. A conventional bath tissue holder is the type that is typically found in a home. Such holders have posts that protrude from the wall and a rod or roller that is positioned between the posts. These holders may also be partially recessed into the wall. Such a holder and a holder with a mounting assembly engaged are illustrated in Figures 66-68. The device may also be used in the absence of a conventional bath tissue holder and may be adapted to provide that the dispenser is fixed to the wall.

30 For example, the system may have a dispenser that has a housing, which is capable of being mounted to a surface, such as a wall, a cabinet, an existing bath tissue dispenser, a toilet, a toilet tank, a stall wall, or a

dashboard of an automobile. The dispenser has an opening that holds a cartridge, which contains the wet wipes. These cartridges are sealed and may be grouped in packages of multiple cartridges. Thus, a package of cartridges may be provided to a user. The user may then select and open one of the cartridges, put it in the dispenser, and use the wipes as needed. When the wipes are used up, the user may simply discard the old cartridge and replace it with a new one. Thus, this system enables the user to conveniently obtain and keep several cartridges of wipes on hand and then use the wipes as needed. By using sealed cartridges to refill the dispenser the user is using a new and fresh product each time and a product that is in contact with fresh surfaces.

By way of example, referring to Figures 1 through 15, there is provided a dispenser 1, which has a housing 2, a tray 3, a cover 7, and a mounting assembly 8. The tray and the cover form a gap 4, through which a wet wipe can extend. That portion of the wipe extending through the gap may be referred to as a tail. The tray and cover additionally have recesses 5, that form an indentation that provides a finger hold, or point where a user can grasp the wet wipe to pull it from the dispenser. Although optional, this dispenser is also provided with a roller 6 for mounting and dispensing a roll of another product, such as dry or conventional bath tissue.

In general the dispenser system illustrated herein can be used with or without conventional dry toilet or bath tissue. If conventional tissue is used with wet wipes it could be positioned in a side-by-side manner, above, or below the wet wipes.

Figures 1 and 4-8 show the dispenser with the cover closed. In Figures 4 and 6, it can be seen most easily that the dispenser generally has a top 100, a side 101, a side 102, a back 103, a bottom 104 and a front 105. Figure 2 show the dispenser and a cartridge in a exploded view. Figure 3 show the dispenser assembled and in a fully opened condition. The fully opened condition provides access to screw 9.

The housing may be made from any suitable material, such as plastic, wood, ceramic, porcelain, glass, paper, metal, thermoplastic elastomers, or

composite materials. For example, polypropylene, polyesters such as polybutylene terephthalate (Pbt), Pbt glass filled, Pbt 15% glass filled, fiberglass, carbon fiber, and acrylonitrile-butadiene-styrene (ABS) may be used to make the housing.

5 The housing may have different shapes and sizes. When the dispenser is intended for use in a home it is desirable that it be of a size that is similar to conventional bath tissue roller mounts. It is particularly desirable that the dispenser be as compact as possible for home use. Further if the cover is in the range of from about 4-1/2 inches (114.3 mm) to 6-7/8 inches
10 (174.6 mm) in width it will be able to aesthetically fit in or mount to the vast majority of toilet paper holders that are in existing houses. Preferably the width of the cover may be greater than about 3 inches (76.2 mm), less than about 6 inches (152.4 mm), less than about 7 inches (177.8 mm), and less than about 8 inches (203.2 mm). The 4-1/2 inches (114.3 mm) by 6-7/8
15 inches (174.6 mm) size provides an added benefit of enabling one size of dispenser to be used in the vast majority of applications in the home. Smaller sizes may be desirable for certain applications or aesthetic reasons, such as a small bathroom. The dispenser and its components may have varied colors, such as the almonds and whites that are seen in porcelain bath fixtures or
20 may have any other desirable color. When the housing is used for industrial or institutional purposes or in commercial applications it may be desirable to make the housing substantially larger and able to hold substantially more rolls of either or both wet and dry wipes and tissue.

 The housing may be configured as shown in Figure 1 to mount onto or
25 into a conventional wall mount toilet paper holder. It may also be mounted directly to a wall, for example by way of a screw, through mounting hole 30, or by other means of fixing the housing to a wall or surface, such as glue, nails, screws, rivets, magnetic attachments, staples, engaging brackets and pressure mountings against the sides of a conventional wall mount for toilet
30 tissues. The housing also may have a lock 13 that engages a tab 12 on the cover to keep the cover closed, yet provide an easy way to open the dispenser. Various other ways to lock or fix the cover to the housing may also

be employed. For example, a lock and key approach may be desirable in commercial applications or houses where there are small children present.

The housing may also have an opening 14 that is made to receive cover mounts 29. The opening 14 and the cover mounts 29 may further be configured to receive a conventional toilet tissue roller. The housing may further be configured to support a means of dispensing, storing, containing or mounting another product such as wipes, toilet tissue, or the like. For example, the housing may support a shelf which may in turn support a container of wet wipes having the same or a different composition from that of the wipes inside the housing. The housing may further have an opening 28 for receiving a pin 27 on the tray 3.

The cover 7 may be made of any similar material to the housing; it may be the same as or a different material from the housing. The cover may be clear or have a window for viewing the amount of wet wipes that remain in the dispenser. It is noted, however, that because the cover is in direct contact with the wet wipe, the cover forms the top of the cartridge when the cartridge is inserted into the dispenser and the cover closed, and wood or any other material that would support bacterial growth would not be favored. It is preferred that all materials that are in contact with the wet wipes be made from materials that discourage, or do not support bacterial growth.

Moreover, anti-bacterial agents, medicinal, botanical or skin and health agents may be added to the materials that are used to construct the components of the dispenser system, including by way of example the dispenser housing, the tray, the wiper blade, the wiper assembly, the cartridge, the cover and the gaskets. In particular any component that is in contact or associated with the wet wipes may have such an agent added to it.

The cover is designed to cooperate with the cartridge 11 to form a barrier to moisture loss from the wet wipes. The cover may also be designed to cooperate with other components of the dispenser system to form a moisture barrier. The dispenser can maintain wet wipes in a moist condition when fully closed for at least 1 day, for at least 2 days, for at least 5 days and for at least 14 days, and preferably for more than 14 days at room conditions

of 73 °F (22.8°C) and 50% relative humidity. The dispenser when fully closed can maintain at least about 15%, at least about 20%, at least about 25%, at least about 50%, and at least about 95% of the moisture of the wipes for a 14 day period at 73 °F (22.8°C) and 50% relative humidity. These moisture retention values can be obtained with a tail of the wipe protruding through the gap, the tail having a length of not more than 1.5 inches (38.1 mm).

The cover may further be designed to cooperate with the cartridge 11, or other components of the dispenser system, to form a barrier to contamination of the wipes within the dispenser. Thus, the cover in cooperation with the cartridge, or other components of the dispenser system, may form a barrier to dirt, dust, mold spores and bacteria.

The space between the inner surface of the front cover and the surface of the lip of the cartridge may vary between about 2 mm and about 10 mm. In this way there is formed a dome above an open cartridge that at least partially covers that opening, which dome is preferably less than about 15 mm, less than about 10 mm, less than about 5 mm and ideally is less than about 2 mm above the lip of the cartridge. The height of the dome may also be measured from the surface of a full roll of wet wipes in which an additional 2 to 7 mm may be added to the height of the dome. Higher domes may also be employed, but such higher domes may be less aesthetically pleasing and may provide for greater amounts of evaporation or moisture loss from the wet wipes.

The cover may be provided with an inside rim 33 (see, e.g., Figure 3) and a wiper 10 (see, e.g., Figures 2 and 3). The cover inside rim and wiper cooperate with the lip 31 of the cartridge. In this way when the cover is closed the inside rim is brought against the lip of the cartridge and the wiper is similarly brought against the tray including the guides, as well as the lip of the cartridge. In a further embodiment, the cover may be provided with a lip, and the cartridge may be provided with a rim to facilitate the cooperation.

The distance between the inside of the cover where the wiper is located and the tray may be less than the height of the wiper blade. Thus, in this configuration the wiper blade would be placed under compression against

the lip, the tray, or the guides 16 or all of them depending on the position of the wiper. Here the wiper blade would exert pressure on the wet wipes. The wiper may also be positioned so that it contacts the wet wipe but does not exert pressure against it, or be positioned so that it is a short distance above the wet wipe. The amount of pressure that the wiper exerts on the wet wipe may vary depending upon several factors, including the purpose for the wiper, the material that the wiper blade is made from, the material that the wet wipe is made from and the material that the cartridge lip 31 is made from.

The tray 3 may be made from any similar material to the housing or cover, and it may be the same material or different material from those of components. The tray may have side walls 22, 23, 80 and 81. Walls 22 and 23 correspond to the sides of the dispenser, wall 80 corresponds to the top of the dispenser, and wall 81 corresponds to the bottom of the dispenser. The tray shown in the figures does not have a back wall, although one may be provided if desired. The side walls may be provided with recesses 24, 25, and 26. These recesses cooperate with protrusions 19, 20 and 21 on the cartridge (19 with 26, 20 with 24 and 21 with 25). In this way the cartridge is securely, yet easily removably held in the dispenser. The tray opening 15 is sized in relation to the cartridge (or the cartridge may be sized in relation to the tray opening) so that the cartridge can easily be slid into and out of the dispenser.

The tray and cartridge together result in a keyed type arrangement that allows the cartridge to be inserted fully or properly in only one orientation into the dispenser. Thus the two elements fit together in a manner similar to a lock and key. This assures that the roll of wipes will unwind from a predetermined orientation, i.e., from the bottom of the roll or the top of the roll. As is apparent from Figure 2 the tray opening and cartridge are not symmetrically shaped. This asymmetry provides for the keyed arrangement. An object is considered symmetrical if there can be a plane which passes through the object such that the portions on either side of the plane are reflections of each other.

In the embodiment shown in Figure 2 the asymmetry in the vertical plane is obtained by having a different number and location of protrusions and recesses on opposite sides. It is recognized that any suitable means to accomplish asymmetry may be employed, such as notches, tongue and groove, or the shapes of the opening and detents. For example, some of the cartridge walls may be flat while others are rounded, or the cartridge lip may be non-planar. Additionally, labeling or marking of the cartridge, the tray, or both can create the effect of asymmetry.

The housing may further have guides 16. The guides may be movable or fixed. The guides may have raised surfaces 16a and lowered surfaces 16b. These guides may be made from the same type of material as the housing. They may be integral with the housing. The guides and the housing may be one continuous piece of plastic. The guides may be designed to cooperate with the wiper to prevent or reduce the tendency of the wipe to skate to one side of the dispenser as the wipe is pulled out and torn off. The guides may also cooperate with the wiper to regulate and control the amount of drag. The tray may have barbs 71 to discourage the placement of wet wipes directly into the dispenser without the use of a protective package, a practice which could cause premature drying of the wet wipes or could allow the growth of bacteria and/or mildew in the wipes. An example of tray without barbs is seen at Figure 26.

The cartridge may be made out of any suitable material, such as plastic. It is preferable that the cartridge be made from a light weight, inexpensive, disposable and recyclable material. The cartridge has side walls 17, 18, 39 and 40 and bottom wall 41. The cartridge has a lip 31 that forms an opening at the top of the cartridge. The cartridge has ribs 32. The ribs may extend part way or all the way along the sides 39 and 40 and the bottom 41. The ribs 32 may cause grooves or indentations to form in the rolls, depending on the density of the roll and conditions of use. These grooves are not necessary to the use of the dispenser system. The curvature of the cartridge bottom is between 40 and 45 degrees, preferably between 42 and 44 degrees.

The cartridge may be any shape or size provided that it fits in or cooperates with the dispenser. For example a cartridge that would be useful for application in the home would have side walls 17 and 18 that are less than 105 mm and side wall 39 and 40 that are less than 134 mm.

5 Instead of protrusions 19, 20 and 21, the cartridge may have recesses at those locations, and the tray may have corresponding protrusions.

Moreover, the cartridge may have ribs, like rib 32, along side walls 17 and 18.

The cartridge may have a lid or cover with a removable strip. Removal of this strip would result in a gap through which the wipes can be dispensed.

10 In this configuration, it may be useful to attach the tail of the wipes to the strip. In this way, removal of the strip facilitates the threading of the wipes through the gap. The cartridge may also have a removable seal over the cover.

The container for the wet wipes may also be flexible. A flexible package made of plastic, metal foil, paperboard or combinations thereof may be used to seal the wipes in a wrapper or may be configured as a pouch with a removable cover. Any material and configuration that prevents the loss of moisture from the wet wipes may be used to package the wipes. A removable cover may contain a removable strip to facilitate dispensing of the wipes. The cover may also contain a lip to cooperate with the cover inside rim and the wiper. The combination of the wipes and the container may be the same size as or smaller than the cartridge so as to fit within the tray.

15
20
25 Figure 16 shows a dispenser in the closed condition with a tail of a wet wipe 36 protruding from gap 4 into the finger hold indentation that is formed by recess 5. In use the tail of the wet wipe would be grasped and pulled generally in the direction of arrow 35 causing the roll to unwind and the wipe to be dispensed from the dispenser. In use the wet wipe may also be subjected to forces tangential and perpendicular to the direction of arrow 35. If these forces occur the guides and the wiper help to prevent the wipe from skating to one side of the gap and bunching up or binding.

30 Figure 17 is an exploded view of a dispenser, cartridge and roll of wipes 34 showing the relationship of these components.

Figure 18 shows a roll of wipes 34 that has a tail 36 and further defines the axis of the roll as 37. Rolls useful with this dispenser or as part of a dispensing system may contain from as little as a few linear inches (or cm) to more than 450 linear inches (11.43 m), to more than linear 600 inches (15.24 m) to more than a thousand linear inches (25.40 m) of wet wipes. The rolls may have a web of material that may have any number of sheets. Usually, the sheets are separated by perforations that enable the sheet to be easily torn from the web but are strong enough that they will not separate while the web is being pulled from the dispenser. An example of a roll that is particularly useful for applications in the home is one that has a diameter of about 2 inches (50.8 mm) to about 3 inches (76.2 mm), of about less than 5 ½ inches (139.7 mm), and preferably has a diameter of about 3 inches (76.2 mm) and more preferably of about 2-7/8 inches (73.0 mm). This roll has from about 400 linear inches (10.16 m) of wipes to about 1000 linear inches (25.40 m) of wipes. Without limitation, each sheet length may be from about 3 inches (76.2 mm) to about 10 inches (254.0 mm) and preferably are about 4.5 inches (114.3 mm). This roll may further have a density of from about 0.3 g/cc to about 1 g/cc, from about 0.5 g/cc to about 1 g/cc and preferably about 0.62 g/cc. A particular example of a roll may be one having a diameter of about 2 inches (50.8 mm) and containing about 450 linear inches (11.43 m) of wipe. Another particular example of a roll may be one having a diameter of about 3 inches (76.2 mm) and containing 450 linear inches (11.43 m) of wipes.

The preferred form of wet wipes for use with the dispenser system is a solid coreless roll as shown in Figure 18. It is to be understood, however, that cored rolls (hollow cores, solid cores and partially solid cores), hollow coreless rolls, and stacks of sheets may also be used in the dispenser system. When density values are referred to herein, it is for the density of the roll and this would exclude any void, for a coreless hollow roll, or space occupied by a core for a cored roll.

Various tests and observations of physical properties are reported in Tables I, II, III, and IV.

Solution add-on level is the amount of solution by weight divided by the amount of dry wipe by weight multiplied by 100 to provide a percentage value.

Base sheet converting refers to the width of the roll and the sheets in the roll, i.e., along axis 37 of the roll in inches.

5 Perforation refers to the amount of cutting and the distance between the cuts in the perforation that separates the sheets in a roll. There are three parameters to this measurement: cut length, bond length and bond spacing. The bond spacing is equal to the sum of the cut length plus the bond length. By way of example, perforations that are useful with wet wipes are ones that
10 have a bond length of 0.02 inch (0.51 mm), a cut length of 0.05 inch (1.27 mm), and a bond spacing of 0.07 inch (1.78 mm), or one that has a bond length of 0.04 inch (1.02 mm), a cut length of 0.09 inch (2.29 mm) and a bond spacing of 0.13 inch (3.30 mm).

15 Dry basis weight is the basis weight of the wipe before the solution is added to the wipe, i.e., before it is wet.

Wet thickness is the thickness of a wet wipe, i.e., after the solution has been added to it, in mm.

Sheet count is the number of sheets in a roll, i.e., the number of sheets created by the perforations.

20 Although all tests are done under TAPPI standard test conditions, the wet wipes are not equilibrated to those conditions. Instead, the wipes are removed from a sealed container or cartridge and tested within a few, generally less than 5-10, minutes after opening. This is about a 5 minute variation in this time period that the wet wipe is exposed to the atmosphere,
25 which does not materially or significantly alter the test results.

Tensile, stretch and TEA (total energy absorbed) values were obtained on the wet product following ASTM 1117-80, section 7, with the following modifications: sample dimensions were 1+/- 0.04 inch (25.4 +/- 1.0 mm) wide and 4.25 +/- 0.04 inches (108.0 +/- 1.0 mm) wide; initial gauge length was 3
30 +/- 0.04 inches (76.2 +/- 1.0 mm); test speed is 12 inches/minute (305.0 mm/min).

MD tensile is the peak load before failure per inch width of the sample, as determined in the machine direction. CD tensile is the peak load before failure per inch width of the sample, as determined in the cross direction. MD stretch is the percentage of elongation the wipe has in the machine direction at the peak load. CD stretch is the percentage of elongation of the wipe in the cross machine direction at the peak load. Total Energy Absorbed (TEA) is the area under the force-elongation curve (in units of lb. and ft., respectively) from the start to the failure point divided by the initial surface area of the sample between the upper and lower grips. For these samples, this surface area was 3 sq. inches (19.4 cm²). Ten specimens were tested for each code, and the average was calculated and reported. The test can be carried out on a standard tensile tester such as a MTS Sintech 1/G test machine with TestWorks 3.10 software. Both the Sintech test machine and the TestWorks software are available from MTS Corporation located at 1400 Technology Drive, Eden Prairie, MN.

Detach refers to the force in grams per sheet that is required to break a perforation, i.e., the amount of force required to separate two sheets in a roll along the perforation. These properties were determined using a MTS Sintech 1/G test machine with TestWorks 3.10 software. Two sheets were removed from a roll. The sheets had a width of 4.25 inches (108.0 mm), and were connected by perforations along the width. The sheets were folded in half along the length such that the width of the sample was 2-1/8 inches (54.0 mm). The top and bottom of the sample were placed in grips having an internal spacing of 2 inches (50.8 mm), such that the perforation line was centered between the upper and lower grips. The upper grip was then displaced upward (i.e. away from the lower grip) at a rate of 10 inches/minute (254.0 mm/min) until the sample was broken along the perforations. The applied force and sample elongation were measured throughout the test. The peak load from the force-elongation curve is recorded so that the detach strength is expressed in units of grams/sheet. The average results from ten samples are reported.

Percentage strain at peak load ("% strain @ pk load") was determined from the results of the test described above. The elongation at the peak load is divided by the initial sample length of 2 inches (50.8 mm), and the result is designated the % strain @ peak load. The average results from ten samples are reported.

Wet thickness refers to the thickness of a wipe that is measured while the sample is subjected to a specified load or weight. The wet thickness of wet wipes and wipes before wetting are reported in Table II. These values are based on samples measuring 3x4 inches (76x102mm) that were individually placed under a confining load of 0.05 pounds/square inch (psi) (345 Pa). The region of the sample that was tested was free of wrinkles and folds. A Starrett Comparator Base Model 653G was used to perform these tests available from Starrett, 121 Crescent St., Athol, MA 01331. This base is precision ground to be flat (tolerance of +/- 0.001 inch, +/- 0.025 mm). A digital displacement indicator (Sony model U30-1SET) was attached to the base via a cantilevered horizontal control arm supported by a vertical shaft. The indicator measures vertical displacement relative to the comparator base to within 0.001 inch (0.025 mm). The load was applied by an acrylic contact foot attached to a vertically traveling spindle shaft that descended to the comparator base. The foot has a diameter of 3.00 inches (76.2 mm), a height of 0.63 inch (16.0 mm) and is flat on the lower surface to a tolerance of +/- 0.001 inch (0.025 mm). The weight of the contact foot, spindle, and the associated hardware, not including the contact force springs in the indicator, is 160.5 +/- 0.1g. The spindle shaft descends to the comparator base with a travel time of 0.5 seconds to 0.75 seconds. The thickness was measured by the indicator as the height of the wipe relative to the surface of the comparator base immediately after the load pressure of 0.05 psi (345 Pa) was applied for 3 seconds. Calibration before testing was performed on a set of standard samples traceable to the National Bureau of Standards.

By way of example and without limitation, wet wipes useful in the present dispensing system may have a dry basis weight from about 10 to about 200 gsm, a dry thickness from about 0.5 to about 2 mm, a wet (i.e.,

wipe with solution or wetting material added) thickness from about 0.3 to about 0.7 mm, a MD wet tensile at least about 250 g/inch (9.8 g/mm), a CD wet tensile at least about 200 g/inch (7.9 g/mm), a MD wet stretch from about 5% to about 30%, a CD wet stretch from about 5% to about 36%, a TEA MD wet strength of from about 0.5 to 2 ft-lb/sq. inch (0.10 to 0.4 J/cm²), a TEA CD-wet-strength of from about 0.5 to 2 ft-lb/sq. inch (0.10 to 0.4 J/cm²), and a solution add-on of about 150-350%.

Peel force measures the amount of force in grams/4.25 inches (g/108.0 mm) required to unroll a roll of wet wipes, i.e., the grams required to unroll a roll that is 4.25 inches (108.0 mm) wide. Thus, these values could be normalized to apply to any width roll in grams/inch of roll width basis. The peel force, as reported in Table II was the force required to unroll a roll as it was resting in an open cartridge and was measured with an MTS Sintech 1/G test machine with TestWorks 3.10 software. A 4.5-inch (114.3 mm) wide clamp with rubber surfaces gripped the tail of a roll, with the roll positioned directly underneath the clamp such that the tail would remain vertical as it was unwound from the roll. The clamp was attached to the crosshead, which pulled the tissue web upward at a speed of 100 cm/minute. Peel force was measured by a 50 Newton load cell. The average load to pull 18 to 20 sheets away from the roll was recorded by averaging two runs in which 4 sheets each were separated and two runs in which 5 sheets each were separated. Only the first 18 to 20 sheets from the roll were used to obtain the measurements of Table II.

The dispensing force, which is the force to pull the wet wipes from the dispenser, may also be determined. This force can be measured with a MTS Sintech 1/G test machine equipped with TestWorks 3.10 software. A clamp with rubber surfaces grips the tail of a roll of wet wipes placed in a dispenser. The initial distance between the clamp and the platform where the dispenser sits is about 12 inches (304.8 mm). The dispenser is placed underneath the clamp. The clamp is attached to the crosshead, which pulls the roll upward at a speed of 100 cm/min. The pull force is measured by a 50 Newton load cell. For each run, the pull force as a function of pull distance curve for pulling 4

5 sheets away from a roll is recorded using the TestWorks 3.10 software. Based on the curve, the average pull force for each run is calculated. The average load of five runs is used to represent the dispensing force of a given roll. Only the first 23 to 25 sheets from the roll were used to obtain the measurement.

10 Table I sets out types of wet sheets and their properties. In Example 1, the solution was a sufficient amount of commercial (no salt) solution such as that which is used in the commercially available KLEENEX® brand COTTONELLE® flushable moist wipes product of Kimberly-Clark Corporation. In Example 2, the solution was a sufficient amount of 4% salt water solution such as a simple 4% salt water solution with other additives as disclosed in the examples of wet wipe applications discussed previously in the Background of Invention, all of which have been and are incorporated herein by reference.

Table I

| | Non-Dispersible Wet Wipe Example 1 | | Dispersible Wet Wipe Example 2 | |
|---------------------------|------------------------------------|-----------|--------------------------------|-----------|
| Basis Weight | 60 gsm | | 60 gsm | |
| Solution | commercial (no salt) | | 4% salt solution | |
| Solution Add on level | 175% | | 228% | |
| Basesheet Converting | 4.25" width | | 4.25" width | |
| Perforation Bond Spacing | 0.11" | | 0.07" | |
| | Run Average | Run STDev | Run Average | Run STDev |
| | | | | |
| Dry Basis Weight (gsm) | 57 | 2 | 66 | 4 |
| Wet Thickness (mm) | 0.56 | 0.02 | 0.47 | 0.01 |
| Sheet Count | 99 | 0.7 | 99 | 1.1 |
| | | | | |
| Wet tensiles | | | | |
| MD Tensile (g/in) | 380 | 26 | 321 | 30 |
| MD Stretch (% Elongation) | 23 | 1.4 | 28 | 1.6 |
| TEA (Ft-Lb/Sq.In) | 0.96 | 0.06 | 1.02 | 0.07 |
| | | | | |
| CD Tensile (g/in) | 329 | 28 | 287 | 29 |
| CD Stretch (% Elongation) | 28 | 1.8 | 34 | 3.5 |
| TEA (Ft-Lb/Sq.In) | 0.93 | 0.09 | 0.97 | 0.13 |
| | | | | |
| Detach (g/sheet) | 752 | 21 | 853 | 34 |
| % strain @ pk load | 8 | 0.5 | 11 | 1.1 |

Table II contains additional data reflecting the properties of disposable wet wipes. This table shows the effects that changing base sheet and solution variables has on the physical properties of the wipes. The pulp used to make these sheets was Weyerhaeuser CF 405. For this example, the binder was example Code E, Table 15, of serial no. 09/564,531. This binder material had a molecular weight of 610,000 and was made from the following monomers provided in the following weight percents: 60% acrylic acid, 24.5% butacrylic acid, 10.5% 2-ethylhexyl-acrylic acid, and 5% AMPS (2-acrylamido-2-methyl-1-propanesulfonic acid).

Table II

| Basesheet Variables | 100% pulp / 65gsm | 100%pulp / 60gsm | 100%pulp / 55gsm | 15%PET / 55gsm |
|-----------------------|-------------------------------------|----------------------------------|----------------------------------|----------------------------------|
| | 22% binder/ 1.1 mm dry thickness | 20% binder/ .76 mm dry thickness | 20% binder/ .76 mm dry thickness | 20% binder/ .84 mm dry thickness |
| Solutions | 0.5% silicone; 0.25% lanolin | | | |
| | Example 3 | Example 4 | Example 5 | Example 6 |
| MD Wet Tensile (g/1") | 500 | 452 | 383 | 391 |
| CD Wet Tensile (g/1") | 445 | 403 | 344 | 310 |
| wet thickness (mm) | 0.46 | 0.40 | 0.39 | 0.41 |
| peel force | 167 | 131 | 106 | |
| Solutions | 1.0% silicone; 0.25% lanolin | | | |
| | Example 7 | | Example 8 | Example 9 |
| MD Wet Tensile (g/1") | 473 | | 401 | 416 |
| CD Wet Tensile (g/1") | 455 | | 348 | 350 |
| wet thickness (mm) | 0.45 | | 0.40 | 0.39 |
| peel force | 170 | | 120 | 115 |
| Solutions | 1.0% silicone; 0.0% lanolin | | | |
| | Example 10 | | | |
| MD Wet Tensile (g/1") | 528 | | | |
| CD Wet Tensile (g/1") | 462 | | | |
| wet thickness (mm) | 0.44 | | | |
| peel force | 162 | | | |

Table III sets out the physical properties of rolls of wet wipes and
 Table IV sets out the theoretical physical properties of rolls of wet wipes.

Table III - Coreless Roll Measurements and Calculations

| Roll Number | Measured Diameter (inches) | Unwound Wet Thickness (mm) | Calculated Roll Density (g/cm ³) | Calculated Effective Thickness (mm) | Compression Factor (%) |
|-------------|-------------------------------|-------------------------------|---|--|---------------------------|
| 1 | 2.77 | NA | 0.621 | 0.340 | 71% |
| 2 | 2.83 | 0.41 | 0.595 | 0.355 | 74% |
| 3 | 2.86 | NA | 0.583 | 0.362 | 76% |
| 4 | 2.90 | NA | 0.567 | 0.373 | 78% |
| 5 | 2.96 | 0.478 | 0.544 | 0.388 | 81% |
| 6 | 2.86 | NA | 0.583 | 0.362 | 76% |
| 7 | 2.98 | NA | 0.537 | 0.393 | 82% |
| 8 | 2.88 | NA | 0.575 | 0.368 | 77% |
| 9 | 2.94 | NA | 0.552 | 0.383 | 80% |
| 10 | 2.86 | 0.448 | 0.583 | 0.362 | 76% |
| 11 | 2.86 | NA | 0.583 | 0.362 | 76% |
| 12 | 2.84 | NA | 0.591 | 0.357 | 74% |
| 13 | 3.00 | NA | 0.530 | 0.399 | 83% |
| 14 | 2.86 | NA | 0.583 | 0.362 | 76% |
| 15 | 2.86 | NA | 0.583 | 0.362 | 76% |

Initial sheet length = 5 inches

Initial sheet width = 4.125 inches

Number of sheets in roll = 90

Dry basesheets basis weight = 65 gsm

Target solution add-on = 225 %

Calculated roll weight = 253 grams

Assumed wet thickness prior to winding = 0.48 mm

Compression factor = calculated effective thickness (wound)/assumed wet thickness prior to winding

Calculated Roll Density = $\text{weight} / \pi r^2 / 4 \times \text{width}$ (calculated roll weight / $\pi \cdot \text{measured diameter}^2 / 4 \cdot \text{initial sheet width}$)

Calculated Effective Thickness - calculated thickness of sheet in roll under pressure of winding.

Table IV - Theoretical Roll Density Possibilities

| Dry | | Calculated | Assumed | Assumed | Calculated | Calculated | |
|-----------|----------|------------|---------------|-------------|------------|----------------------|----------|
| Basesheet | Solution | Roll | Pre-wound | Compression | Roll | Roll | |
| Weight | Add-on | Weight | Wet Thickness | Factor | Diameter | Density | Footnote |
| (gsm) | (%) | (grams) | (mm) | (%) | (inches) | (g/cm ³) | |
| 65 | 225 | 253 | 0.48 | 1.300 | 3.75 | 0.34 | (1) |
| 65 | 225 | 253 | 0.48 | 1.150 | 3.53 | 0.38 | |
| 65 | 225 | 253 | 0.48 | 1.000 | 3.29 | 0.44 | (2) |
| 65 | 225 | 253 | 0.48 | 0.900 | 3.12 | 0.49 | |
| 65 | 225 | 253 | 0.48 | 0.800 | 2.94 | 0.55 | |
| 65 | 225 | 253 | 0.48 | 0.710 | 2.77 | 0.62 | (3) |
| 65 | 225 | 253 | 0.48 | 0.600 | 2.55 | 0.73 | |
| 65 | 225 | 253 | 0.48 | 0.500 | 2.33 | 0.88 | (4) |
| 65 | 225 | 253 | 0.48 | 0.440 | 2.18 | 1.00 | |
| 65 | 225 | 253 | 0.48 | 0.405 | 2.09 | 1.09 | (5) |
| 65 | 300 | 311 | 0.48 | 1.300 | 3.75 | 0.42 | |
| 65 | 300 | 311 | 0.48 | 1.150 | 3.53 | 0.47 | |
| 65 | 300 | 311 | 0.48 | 1.000 | 3.29 | 0.54 | |
| 65 | 300 | 311 | 0.48 | 0.900 | 3.12 | 0.60 | |
| 65 | 300 | 311 | 0.48 | 0.800 | 2.94 | 0.68 | |
| 65 | 300 | 311 | 0.48 | 0.700 | 2.75 | 0.77 | |
| 65 | 300 | 311 | 0.48 | 0.600 | 2.55 | 0.90 | |
| 65 | 300 | 311 | 0.48 | 0.500 | 2.33 | 1.08 | |
| 50 | 225 | 195 | 0.48 | 1.300 | 3.75 | 0.26 | |
| 50 | 225 | 195 | 0.48 | 1.150 | 3.53 | 0.29 | |
| 50 | 225 | 195 | 0.48 | 1.000 | 3.29 | 0.34 | |
| 50 | 225 | 195 | 0.48 | 0.800 | 2.94 | 0.42 | |
| 50 | 225 | 195 | 0.48 | 0.600 | 2.55 | 0.56 | |
| 50 | 225 | 195 | 0.48 | 0.400 | 2.08 | 0.85 | |
| 50 | 225 | 195 | 0.48 | 0.313 | 1.84 | 1.08 | |
| 50 | 150 | 150 | 0.48 | 1.300 | 3.75 | 0.20 | (6) |
| 50 | 150 | 150 | 0.48 | 1.000 | 3.29 | 0.26 | |
| 50 | 150 | 150 | 0.48 | 0.800 | 2.94 | 0.33 | |
| 50 | 150 | 150 | 0.48 | 0.600 | 2.55 | 0.43 | |
| 50 | 150 | 150 | 0.48 | 0.400 | 2.08 | 0.65 | |
| 50 | 150 | 150 | 0.48 | 0.300 | 1.80 | 0.87 | |
| 50 | 150 | 150 | 0.48 | 0.240 | 1.61 | 1.09 | |

Initial sheet length = 4.5 inches

Initial sheet width = 4.125 inches

Number of sheets in roll = 100

Total roll length = 37.5 feet

Footnotes - Table IV

- (1) A very loose roll, no compression, lots of air spaces, giving an overall low density
- (2) A roll that theoretically has no compression; this density and volume for roll vs. unrolled would be equal
- (3) A roll that has been produced, with this compression and roll density
- (4) Estimate of maximum compression achievable before product failure from in-wound tension exceeding strength of sheets or perforations
- (5) Physical limitation of the maximum density achievable based on incompressibility of water
- (6) Low end density achieved by a loose roll, low dry basis weight and low %Add-on

The dispensing force should be ideally considerably less than the detach force for a roll of perforated wipes. In this way it is assured that the wipes will be able to be pulled from, or removed from, the dispenser without inadvertently breaking the perforation. Thus, a dispensing force of from about 100g to about 600g is contemplated, a dispensing force of from about 150g to 250g is further contemplated and ideally a dispensing force of less than 200g is desirable, with forces based on g/4.25 inches (g/108.0 mm). Normalized, these forces are 23.5 g/inch (0.93 g/mm) to 141.2 g/inch (5.56 g/mm), 35.3 g/inch (1.39 g/mm) to 58.8 g/inch (2.32 g/mm), and 47.1 g/inch (1.85 g/mm).

Generally a peel force of from 80g - 300g (per 4.25 inches, 108.0 mm) is contemplated, although lower peel forces may be obtained with different types of wipe products. The cartridge adds minimal resistance to the roll as it is unwound. Thus, the force required to unwind a roll is not materially increased by the cartridge. The roll or stack of wipes may also be placed directly in the tray for dispensing, without the use of a cartridge.

Figure 19 shows the roll 34 as it is placed in a cartridge in a dispenser. The spiral line 38 is intended to represent the manner in which the roll is wound and depicts in that configuration a roll that is being unwound from the bottom

That figure further shows the relationship of the wiper 10 to the wet web. Figure 20 shows the roll 34 in cartridge 11, with spiral line 38 indicating the wind of the roll. This figure shows the relationship of the roll and the ribs 32. As can be seen from this figure the roll is lifted off of the side and bottom walls of the cartridge by rib 32. Thus, the amount of surface area of the roll

that is in contact with the cartridge is reduced. This in turn reduces the drag that the roll experiences from friction with the cartridge when the roll is turned.

Figure 21 shows a portion of a cartridge 11, the lip 31 of the cartridge, and the side walls 39 and 40. The angle at which the cartridge is positioned has an effect on how well the dispenser will perform. The angle will have a tendency to increase or reduce the drag associated with pulling the wipe out. It will have an effect on the amount of siphoning, wicking or drying that may take place in the wet wipe. It may also have an effect on how the roll acts as it is unwound, becoming smaller and smaller in the cartridge. The angle of the cartridge can be measured by the angle that the lip 31 forms with a true vertical axis, shown as 42. For a dispenser system as shown in Figures 1-19, the angle 43 that the lip 31 has with a true vertical axis 42 should be from about 10 degrees to about 80 degrees, from about 20 degrees to about 70 degrees, at least greater than 20 degrees, at least smaller than 60 degrees, and preferably about 30 degrees.

Further the angle may be selected such that it balances the forces between the peel forces associated with unrolling the roll and the weight of the roll forcing it down against the ribs. Thus the wipe can be unrolled without having excessive movement of the roll within the cartridge, which in turn overcomes the tendency of the roll to translate toward the gap and bind or jam the dispenser. Additionally, the selection of the angle may play a role in reducing the drying of the wet wipe. As the angle 43 is increased the difference between the height of the top of the roll and the tail is decreased, thus decreasing any siphoning driving force.

Figures 22 through 25 show various views of an example of a cover. In this example the cover 7 has cover mounts 29, a recess 5 for forming part of a finger hold indentation, an inside rim 33, which has a top inside rim section 45 and side inside rim sections 46 (of which only one can be seen in Figure 24), leg sections 72, and posts 44. In this example the posts are used to connect the wiper to the cover.

Figures 26 through 28 show an example of a tray 3a. In this example the tray has an opening 15a with 3 recesses on both sides. The tray has guides that are rollers 47.

In a further example of the tray, the tray is fixed to the housing. This may be accomplished by having the housing and tray being made out of a single piece of material or having the housing and tray joined together by a permanent bonding means, such as welding, heat bonding or gluing. In yet a further example the tray may be attached to the housing so that it cannot rotate with respect to the housing, yet still may be removable.

Figure 29 shows the rollers 47 used in the tray 3a shown Figure 26-28. The rollers have raised surfaces 67 and lowered surfaces 68. The raised and lowered surfaces of the rollers as well as any guide may also be a ridge or a rim. As the raised or lowered surfaces become narrower, i.e., become sharper, care must be taken not to cut the wet web.

Wiper blades may be made out of any flexible material, such as thermoplastic elastomers, foam, sponge, plastic, or rubber having a shore A durometer hardness value ranging about 0 to 80, from about 15 to about 70 and preferably from about 30 to about 60. It is further preferred that the wiper blades be made from a material that will form a good moisture and contamination barrier. Examples of preferred types of material are SANTOPRENE®, Kraton®, silicone, or styrene ethylene/butylene styrene (SEBS). The wiper blade is designed to function with the guides and the tray and to a limited extent the lip of the cartridge. Depending on the placement of the wiper, it could have greater or lesser interaction with these components of the dispensing system. The gap between the end of the wiper blade and the tray may be varied depending upon the thickness of the wet wipes and how much drag is needed for the dispensing system to function as desired. The wiper blade can help to hold the tail of the wipe in place and thus keep the tail from falling back through the gap and into the cartridge. The wiper blade material has a Gurley stiffness value (ASTM D 6125-97) between about 100 mg and 8000 mg, preferably between about 200 mg and 6000 mg, and more preferably between about 400 mg and 3000 mg.

The force applied to the wipe by the wiper blade when pulling the wipe from the dispenser should not be greater than the tensile strength of the wipe in the non-perforated region and not greater than the perforation tensile strength of a perforated wipe. If the wipes are made such that they are dry in storage and become wet during use, the blade may be configured to exert pressure on the wipe. In this case, the dispensing of a sheet or sheets causes sufficient shear to be applied to the wipe to permit the moisture to be released. For example, this force or shear may be sufficient to cause microcapsules of fluid to burst or may be sufficient to rupture a protective emulsion which contains the fluid.

Figures 32 through 37 show an example of a wiper assembly. In this example the wiper assembly 10 comprises a chassis 48, and a blade 50 that has fingers 49. In this example the fingers are designed to cooperate with the lowered surfaces 16b (Figure 2A) of the guides on the housing. In this example the blade is made of SANTOPRENE® and the chassis is made of polypropylene.

Figures 38 through 39 show an example of a wiper blade. In this example the wiper blade is formed of a single piece (see Figure 38) of material that is folded over to form the wiper blade (see Figure 39). The wiper blade has raised portions 51 that reduce the amount of surface area of the wiper blade that contacts the sheet and raised areas 53 and lowered areas 52 that cooperate with the raised and lowered areas of the guides.

Figures 62 to 65 illustrate dispensers 1 that have a rounded member 95 or rounded ridges 96. These components are shown as being part of or attached to the wiper blade assembly 99 and adjacent the wiper blade 74. These components prevent or reduce the tendency of the roll from binding in the gap as the size of the roll decreases.

Figures 57 through 61 show an example of a wiper assembly. In this example the wiper comprises a chassis 73, and a wiper blade 74 (74a shows sections of blade engaging and protruding through the chassis) that has fingers 75. In this example the fingers are designed to cooperate with the lowered surfaces of the guides 16 in the dispenser. In this example the blade

is made of SANTOPRENE® and the chassis is made of polypropylene. This embodiment contains raised or thicker areas 97 of the wiper. These raised areas cooperate with the guides 16 on the tray.

Figures 40 through 41 show an example of a roller bar for toilet tissue. This example comprises a first roller housing 80, a second roller housing 81 and a spring 82. Figures 55 through 56 show other embodiments of the dispenser.

Figures 42 through 45 show an example of a mounting assembly. This mounting assembly comprises slide arms 55 and 56, housings 57 and 58, end openings 59, and springs 61. The slide arms have stops 60 that cooperate with stops 83 to limit the maximum longitudinal extension of the slide arms. The mounting assembly has a third housing 84 that has tabs 63 that cooperate with openings 62 to secure the housings 57 and 58 to housing 84. Housing 84 further has a threaded passage 64 for receipt of a screw. Figure 44 shows the mounting assembly with the slide arms in a retracted position, while Figure 45 shows the mounting assembly with the slide arms in an extended position. In one embodiment, the length of the mounting assembly in the retracted position is about 3.5 inches (88.9 mm), and the length of the mounting assembly in the extended position the length is about 8 inches (203.2 mm). Preferably the length of the mounting assembly in the retracted position is about 5 inches (127.0 mm), and the length of the mounting assembly in the extended position the length is about 6.5 inches (165.1 mm). The three housing design may also be simplified into a two housing embodiment or a single housing embodiment. In the two housing embodiment, top and bottom or side and side halves are fixed together to hold the spring and slide arms.

The assembly is held in place by having the ends out the side arms positioned in holes in the object that the dispenser is to be attached to, for example the holes in a toilet paper dispenser mounted into a wall. The springs keep the slide arms extended and thus hold them in the holes. A screw is then inserted through the dispenser and the passage 64 and

tightened down, forcing the end engagement surfaces 90 against the wall of the holes in the toilet tissue dispenser.

Figure 66 depicts a conventional bath tissue holder 85 that is the partially recessed type, having posts 86. Figure 67 depicts a conventional bath tissue holder 85 that is not recessed and having posts 86 and a roller 6. Figure 68 illustrates the holder of Figure 67 with the roller removed and a mounting assembly 8 engaged with the post 86. In actual use the mounting assembly would be joined with a dispenser, as shown for example in Figure 2.

The mounting assembly should be made out of material that is strong enough to withstand the forces that are placed on it to hold the dispenser in place. The material should have enough strength to withstand the forces that the screw will place on the treaded passage. Examples of materials that may provide these features and be used to make the mounting assembly are 15% or more glass filled Pbt, ABS or any material having similar strength properties.

Figures 46 to 50 show an example of a screw 9 that cooperates with a mounting device, such as the example shown in Figures 42 – 45. The screw should be made of material that meets the same strength requirements as set out for the mounting assembly. In this example the screw has a thread design that requires 6 turns to move it 1 inch (25.4 mm). Standard ACME conventional screw threads require 23 turns to move it 1 inch (25.4 mm). This thread design provides greater ease for the user to attach the dispenser because it requires less turns of the screw to do so. In this example the screw additionally has a large head, with a groove 65 and grips 66. The groove can fit a coin or screwdriver. The larger head of the screw and the groove, however, are not necessary, although they may be preferred to provide greater ease to install the dispenser system. The screw may further be provided with a lock nut or jam nut near the head to prevent loosening of the screw after it is tightened.

When the dispenser is affixed to a surface, such as a wall, dispenser is secured against wobbling during use. Thus, the dispenser is held in place during use with little or no wobbling. The reduction or elimination of wobbling

may occur under most, if not all, conditions of normal use, such as for example, when wipes or conventional tissue are removed smoothly, roughly, in a slashing manner or by any other common manner of using such products. For example, the dispenser can withstand a vertical downward force, a
5 vertical upward force, and a horizontal side force of 1116.6g. for about 10 minutes without deflecting, moving or wobbling. Alternative mountings may also be employed. These mountings may be fixed or removable. They may include by way of example such fastening systems as cable ties, wing nuts, anchor bolts, click and grooves and snap and lock mechanisms.

10 Figures 51 – 53 show an example of a cartridge. In this example the cartridge has protrusions 69 on its side walls.

Figure 54 shows an example of a package of cartridges. In use this package would be filled with rolls of wet wipes, one for each cartridge. The cartridges would than be sealed, by placing a totally or partially removable
15 cover over the lips 31. The seal is preferably moisture and bacterial resistant. The consumer would then purchase the package and remove a cartridge, open the dispenser and place the cartridge in the dispenser. The top of the cartridge or the slit in the cover can be removed either before placing the cartridge in the dispenser or after it is inserted in the dispenser. The end of
20 the roll of wet wipes is then pulled out and over the tray and guides and the cover is then closed, thus providing an efficient system for dispensing wet wipes.

WE CLAIM:

1. A method for dispensing wet wipes comprising:
removing a spindle from a toilet tissue dispenser;
mounting a wet wipes dispenser in the toilet tissue dispenser,
5 the wet wipes dispenser having an opening;
securing the wipes dispenser to the toilet tissue dispenser and
at least one surface such that the wipes dispenser does not move
substantially during use;
inserting a container of wet wipes;
10 threading the wipes through the wipes dispenser opening; and
removing wet wipes from the wipes dispenser.
2. The method of claim 1, wherein the mounting comprises
engaging the wet wipes dispenser with the posts of the toilet tissue dispenser
by means of a mounting assembly.
- 15 3. The method of claim 1, wherein the securing comprises applying
pressure to the posts of the toilet tissue dispenser and the at least one
surface by adjusting a screw in a mounting assembly.
4. The method of claim 1, wherein the wipes dispenser is rigidly,
removably, and adjustably secured to the toilet tissue dispenser and at least
20 one surface.
5. The method of claim 1, wherein the securing is such that the
wipes dispenser does not substantially move over a period of 10 minutes
when subjected to a force of at least 500 g.
- 25 6. The method of claim 1, wherein the securing is such that the
wipes dispenser does not substantially move over a period of 10 minutes
when subjected to a force of at least 800 g.

7. The method of claim 1, wherein the securing is such that the wipes dispenser does not substantially move over a period of 10 minutes when subjected to a force of at least 1100 g.

5 8. A method for dispensing wet wipes comprising:
removing a spindle from a toilet tissue dispenser;
mounting a wet wipes dispenser in the toilet tissue dispenser by
means of a mounting assembly, the mounting assembly having arms and a
screw, the wet wipes dispenser having an opening;
10 inserting a container of wet wipes;
threading the wipes through the wipes dispenser opening; and
removing wet wipes from the wipes dispenser.

9. The method of claim 8, wherein the arms and screw are adjustable.

15 10. The method of claim 8, wherein the screw passes through the body of the mounting assembly perpendicular to the direction of motion of the arms.

11. The method of claim 8, wherein the mounting comprises engaging the arms of the mounting assembly with the posts of the toilet tissue dispenser.

20 12. The method of claim 8, wherein the mounting comprises adjusting the screw in the mounting assembly such that pressure is applied to the posts of the toilet tissue dispenser and at least one surface.

25 13. The method of claim 8, wherein the wipes dispenser is rigidly, removably, and adjustably secured to the toilet tissue dispenser and at least one surface.

14. The method of claim 8, wherein the mounting is such that the wipes dispenser does not substantially move over a period of 10 minutes when subjected to a force of at least 500 g.

15. The method of claim 8, wherein the mounting is such that the wipes dispenser does not substantially move over a period of 10 minutes when subjected to a force of at least 800 g.

5 16. The method of claim 8, wherein the mounting is such that the wipes dispenser does not substantially move over a period of 10 minutes when subjected to a force of at least 1100 g.

17. A method for dispensing wet wipes comprising:
removing a spindle from a toilet tissue dispenser;
securing a wet wipes dispenser to the toilet tissue dispenser and
10 at least one surface by means of a screw in a mounting assembly, the wet wipes dispenser having an opening;
inserting a container of wet wipes;
threading the wipes through the wipes dispenser opening; and
removing wet wipes from the wipes dispenser.

15 18. The method of claim 17, wherein the securing comprises applying pressure to the posts of the toilet tissue dispenser and the at least one surface by adjusting the screw in the mounting assembly.

19. The method of claim 17, wherein the screw comprises a thread design that requires 6 turns to move the screw a distance of 1 inch through
20 the mounting assembly.

20. The method of claim 17, wherein the screw comprises a large head.

21. The method of claim 17, wherein the securing is such that the wipes dispenser does not substantially move over a period of 10 minutes
25 when subjected to a force of at least 500 g.

22. The method of claim 17, wherein the securing is such that the wipes dispenser does not substantially move over a period of 10 minutes when subjected to a force of at least 800 g.

23. The method of claim 17, wherein the securing is such that the wipes dispenser does not substantially move over a period of 10 minutes when subjected to a force of at least 1100 g.

5 24. A method for dispensing wet wipes comprising:
removing a spindle from a toilet tissue dispenser;
mounting a wet wipes dispenser in the toilet tissue dispenser by
means of a mounting assembly, the wet wipes dispenser having an opening;
inserting a container of wet wipes;
10 threading the wipes through the wipes dispenser opening; and
removing wet wipes from the wipes dispenser.

25. The method of claim 24, wherein the container of wet wipes is removed from a plurality of containers.

26. The method of claim 24, wherein the container comprises a cover that is at least partially removable.

15 27. The method of claim 24, wherein the wet wipes dispenser comprises guides and a dispenser cover.

28. The method of claim 27, wherein the threading comprises placing one end of the wipes on the guides and closing the dispenser cover.

20 29. The method of claim 24, wherein the dispenser comprises recesses.

30. The method of claim 29, wherein the removing comprises grasping the wipe in the area exposed by the recesses.

31. The method of claim 24, wherein the removing comprises separating the wipes at perforations.

25 32. A method for dispensing wet wipes comprising:
removing a spindle from a toilet tissue dispenser;

mounting a wet wipes dispenser in the toilet tissue dispenser by means of a mounting assembly, the wet wipes dispenser having wet wipes and an opening; and

removing wet wipes from the dispenser.

5 33. The method of claim 32, wherein the wipes dispenser is rigidly, removably, and adjustably secured to the toilet tissue dispenser and at least one surface.

34. The method of claim 32, wherein the wipes are contained in a cartridge having a specific orientation, the cartridge having a lower side wall.

10 35. The method of claim 34, wherein the lower side wall is at an angle of between about 100 degrees and 170 degrees from the vertical axis of the mounted wet wipes dispenser.

36. The method of claim 34, wherein the cartridge fits into the wet wipes dispenser in only one orientation.

15 37. The method of claim 32, wherein the wet wipes dispenser comprises moisture barrier means.

38. The method of claim 37, wherein the removing comprises pulling the wipes through the moisture barrier means and the opening.

20 39. The method of claim 32, wherein the removing comprises separating the wipes at perforations.

40. A method for dispensing wet wipes comprising:
removing a spindle from a toilet tissue dispenser;
mounting a wet wipes dispenser in the toilet tissue dispenser by means of a mounting assembly;

25 the wet wipes dispenser comprising an interior, an opening, guides, a cover, and a wiper blade;
opening a container of wet wipes, the container having a wipes cover;

inserting a container of wet wipes into the wet wipes dispenser;
threading the wipes through the dispenser opening; and
removing wet wipes from the dispenser.

5 41. The method of claim 40, wherein the wipes dispenser is rigidly,
removably, and adjustably secured to the toilet tissue dispenser and at least
one surface.

 42. The method of claim 40, wherein the opening the container
comprises removing the wipes cover from the container.

10 43. The method of claim 40, wherein the opening the container
comprises removing a strip from the wipes cover.

 44. The method of claim 40, wherein the inserting comprises placing
the container inside the interior of the wet wipes dispenser.

15 45. The method of claim 40, wherein the inserting comprises
matching the shape of the container to the shape of the interior of the wet
wipes dispenser.

 46. The method of claim 40, wherein the threading comprises
closing the dispenser cover.

20 47. The method of claim 40, wherein the threading comprises
placing one end of the wipe between the guides and a wiper blade, the wiper
blade being attached to the dispenser cover.

 48. The method of claim 40, wherein the removing comprises pulling
the wipe between the guides and the wiper blade.

 49. The method of claim 40, wherein the removing comprises
separating the wipes at perforations.

25 50. A method for dispensing wet wipes comprising:
removing a spindle from a toilet tissue dispenser;

mounting a wet wipes dispenser in the toilet tissue dispenser by means of a mounting assembly, the wet wipes dispenser having an opening and wet wipes;

5 securing the wipes dispenser to the toilet tissue dispenser and at least one surface by means of a screw in the mounting assembly such that the wipes dispenser does not move substantially during use; and removing wet wipes from the wipes dispenser.

51. A method for dispensing wet wipes comprising:

10 mounting a wet wipes dispenser in a toilet tissue dispenser such that the wipes dispenser does not move substantially during use, the wet wipes dispenser having an opening;

 inserting a container of wet wipes;

 threading the wipes through the wipes dispenser opening; and removing wet wipes from the wipes dispenser.

15 52. A method for dispensing wet wipes comprising:

 mounting a wet wipes dispenser in the toilet tissue dispenser by means of a mounting assembly, the wet wipes dispenser having wet wipes;

 securing the wipes dispenser to the toilet tissue dispenser and at least one surface by means of a screw in the mounting assembly; and

20 removing wet wipes from the wipes dispenser.

53. A method for dispensing wet wipes comprising:

 securing a wet wipes dispenser to a toilet tissue dispenser by applying pressure to the posts of the toilet tissue dispenser and at least one surface by adjusting a screw in a mounting assembly;

25 inserting a container of wet wipes; and

 removing wet wipes from the wipes dispenser.

54. A method for dispensing wet wipes comprising:

30 attaching a wet wipes dispenser to a surface such that the wipes dispenser does not move substantially during use, the wet wipes dispenser having an opening;

inserting a container of wet wipes;
threading the wipes through the wipes dispenser opening; and
removing wet wipes from the wipes dispenser.

5 55. The method of claim 54, wherein the attaching is accomplished
through the use of at least one fastener.

56. The method of claim 54, wherein the attaching is accomplished
through the use of at least one adhesive.

57. The method of claim 54, wherein the attaching is accomplished
through the use of magnetic attachments.

10 58. The method of claim 54, wherein the attaching is accomplished
through the use of engaging brackets.

59. The method of claim 54, wherein the attaching is such that the
wipes dispenser does not substantially move over a period of 10 minutes
when subjected to a force of at least 500 g.

15 60. The method of claim 54, wherein the securing is such that the
wipes dispenser does not substantially move over a period of 10 minutes
when subjected to a force of at least 800 g.

20 61. The method of claim 54, wherein the securing is such that the
wipes dispenser does not substantially move over a period of 10 minutes
when subjected to a force of at least 1100 g.

25 62. A method for dispensing wet wipes comprising:
 attaching a wet wipes dispenser to a surface such that the wipes
dispenser does not move substantially during use, the wet wipes dispenser
comprising an opening, guides, and a dispenser cover;
 inserting a container of wet wipes;
 threading the wipes through the wipes dispenser opening; and
 removing wet wipes from the wipes dispenser.

63. The method of claim 62, wherein the container of wet wipes is removed from a plurality of containers.

64. The method of claim 62, wherein the container comprises a cover that is at least partially removable.

5 65. The method of claim 62, wherein the wet wipes dispenser comprises guides and a dispenser cover.

66. The method of claim 65, wherein the threading comprises placing one end of the wipes on the guides and closing the dispenser cover.

10 67. The method of claim 62, wherein the dispenser comprises recesses.

68. The method of claim 67, wherein the removing comprises grasping the wipe in the area exposed by the recesses.

69. The method of claim 62, wherein the removing comprises separating the wipes at perforations.

15 70. A method for dispensing wet wipes comprising:
attaching a wet wipes dispenser to a surface, the wet wipes dispenser comprising an interior, an opening, guides, a cover, and a wiper blade;

20 opening a container of wet wipes, the container having a wipes cover;

inserting a container of wet wipes into the wet wipes dispenser;
threading the wipes through the dispenser opening; and
removing wet wipes from the dispenser.

25 71. The method of claim 70, wherein the wipes are contained in a cartridge having a specific orientation, the cartridge having a lower side wall.

72. The method of claim 71, wherein the lower side wall is at an angle of between about 100 degrees and 170 degrees from the vertical axis of the mounted wet wipes dispenser.

5 73. The method of claim 71, wherein the cartridge fits into the wet wipes dispenser in only one orientation.

74. The method of claim 70, wherein the inserting comprises placing the container inside the interior of the wet wipes dispenser.

10 75. The method of claim 70, wherein the inserting comprises matching the shape of the container to the shape of the interior of the wet wipes dispenser.

76. The method of claim 70, wherein the opening the container comprises removing the wipes cover from the container.

77. The method of claim 70, wherein the opening the container comprises removing a strip from the wipes cover.

15 78. The method of claim 70, wherein the threading comprises closing the dispenser cover.

79. The method of claim 70, wherein the threading comprises placing one end of the wipe between the guides and a wiper blade, the wiper blade being attached to the dispenser cover.

20 80. The method of claim 70, wherein the removing comprises pulling the wipe between the guides and the wiper blade.

81. The method of claim 70, wherein the removing comprises separating the wipes at perforations.

82. A method for dispensing wet wipes comprising:

attaching a wet wipes dispenser to a surface such that the wipes dispenser does not move substantially during use, the wet wipes dispenser comprising wet wipes, an opening, and a moisture barrier means;
pulling the wet wipes through the moisture barrier means; and
removing wet wipes from the dispenser.

83. A method for dispensing wet wipes comprising:
attaching a wet wipes dispenser to a surface such that the wipes dispenser does not move substantially during use, the wet wipes dispenser comprising an opening and a moisture barrier means;
inserting a container of wet wipes into the dispenser;
pulling the wet wipes through the moisture barrier means; and
removing wet wipes from the dispenser.

84. A method for dispensing wet wipes comprising:
mounting a wet wipes dispenser in a toilet tissue dispenser by means of a mounting assembly such that the mounting assembly and dispenser together exert pressure on the posts of the toilet tissue dispenser and on at least one surface.

85. A method for dispensing wet wipes comprising:
removing a spindle from a toilet tissue dispenser;
mounting a wet wipes dispenser in the toilet tissue dispenser by means of a mounting assembly, the dispenser having a movable tray, the mounting assembly having a screw;
moving the tray such that the screw is uncovered; and
adjusting the screw in the mounting assembly such that the wipes dispenser is secured to the toilet tissue dispenser and at least one surface.

86. A method for dispensing wet wipes comprising:
mounting a wet wipes dispenser in the toilet tissue dispenser by means of a mounting assembly, the wet wipes dispenser having wet wipes and a tray, the mounting assembly having a screw;

moving the tray such that the screw is uncovered;
securing the wipes dispenser to the toilet tissue dispenser and
at least one surface by means of the screw;
repositioning the tray in the dispenser; and
removing wet wipes from the wipes dispenser.

87. A method for dispensing wet wipes comprising:

mounting a wet wipes dispenser in a toilet tissue dispenser such
that the wipes dispenser does not move substantially during use, the wet
wipes dispenser having an opening, the wet wipes dispenser having a
dispensing force;

selecting a package of wet wipes such that the tensile strength
of the wet wipes is at least twice that of the dispensing force;

inserting the package of wet wipes;

threading the wipes through the wipes dispenser opening; and

removing wet wipes from the wipes dispenser.

88. The method of claim 87, wherein the tensile strength of the
wipes is at least five times that of the dispensing force.

89. The method of claim 87, wherein the tensile strength of the
wipes is at least seven times that of the dispensing force.

90. A method for dispensing wet wipes comprising:

mounting a wet wipes dispenser in a toilet tissue dispenser such
that the wipes dispenser does not move substantially during use, the wet
wipes dispenser having an opening, the wet wipes dispenser having a
dispensing force;

selecting a package of perforated wet wipes such that the
detach strength of the wet wipes is at least five times that of the dispensing
force;

inserting the package of wet wipes;

threading the wipes through the wipes dispenser opening; and

removing wet wipes from the wipes dispenser.

91. The method of claim 90, wherein the detach strength of the wipes is at least seven times that of the dispensing force.

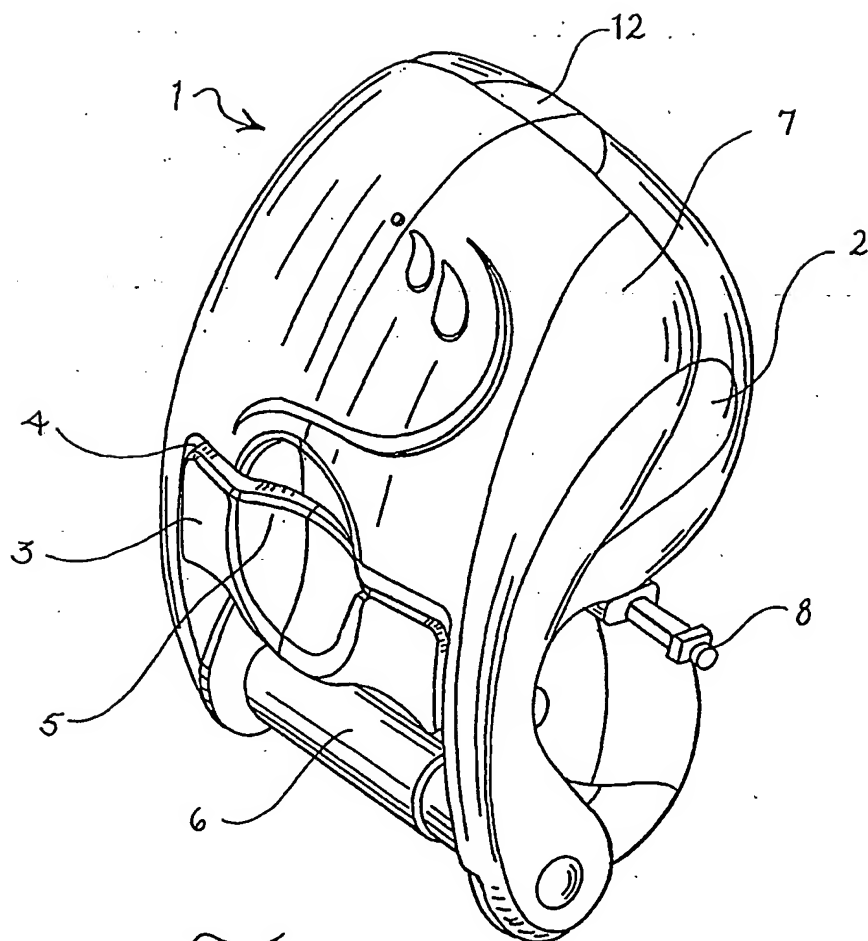


Fig. 1

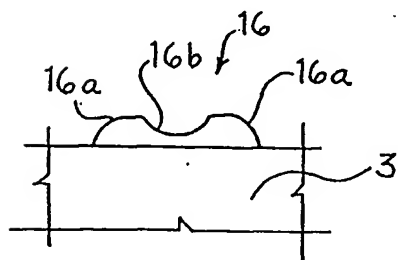


Fig. 2 A

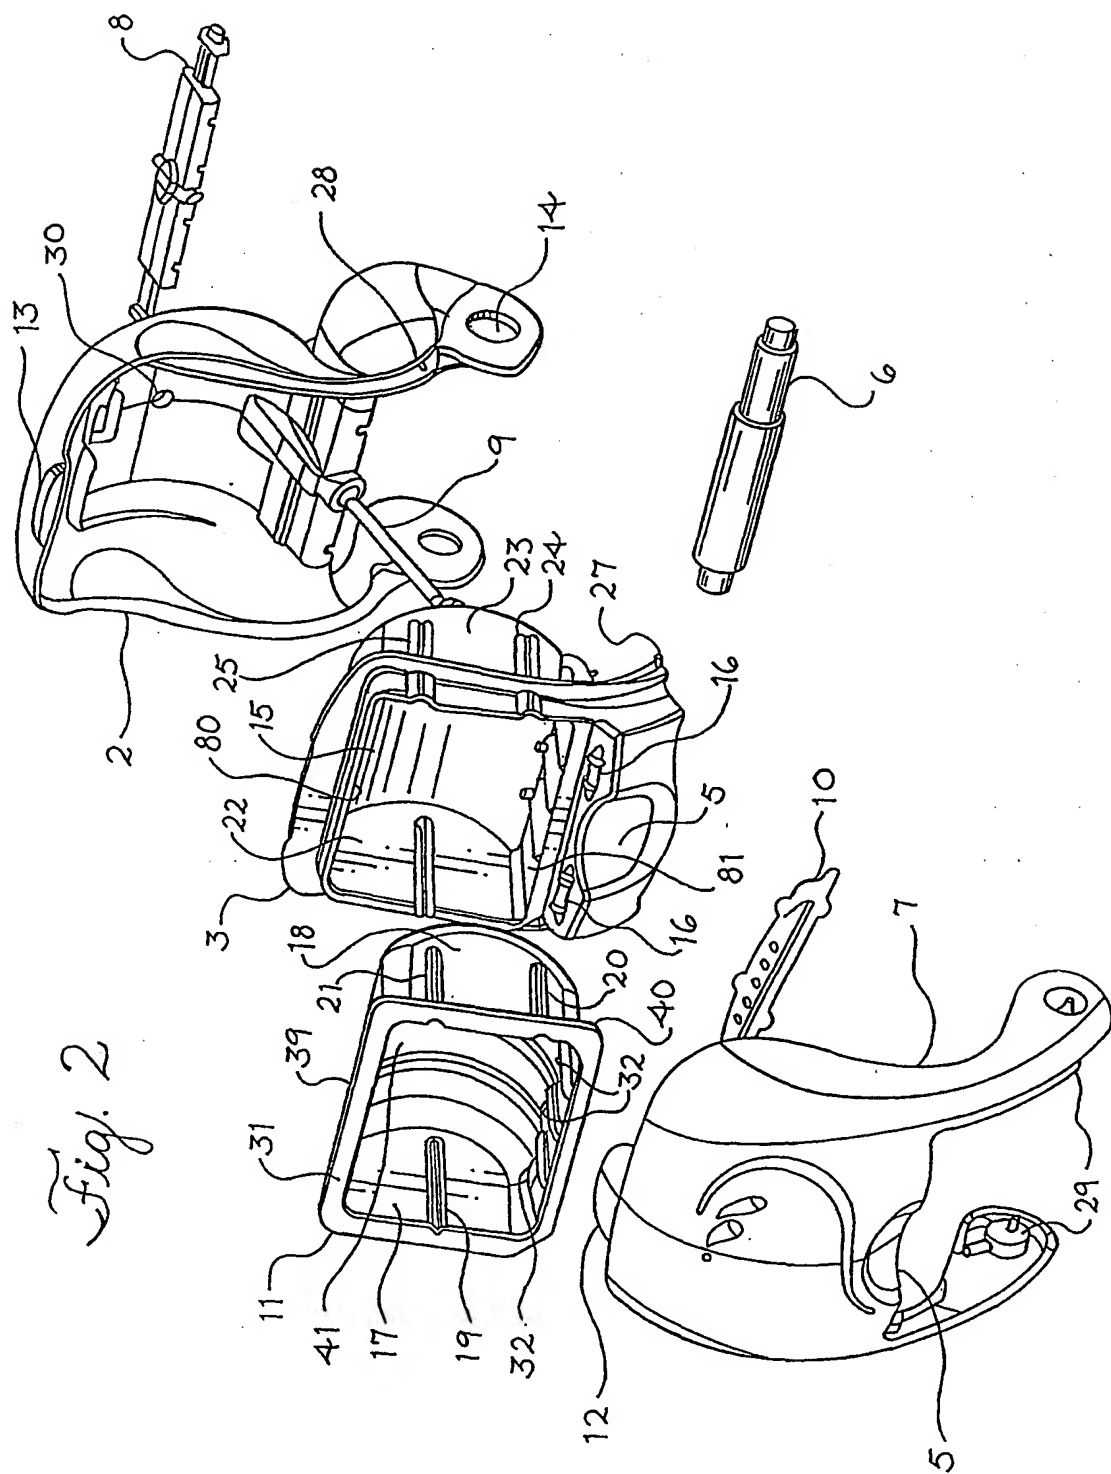
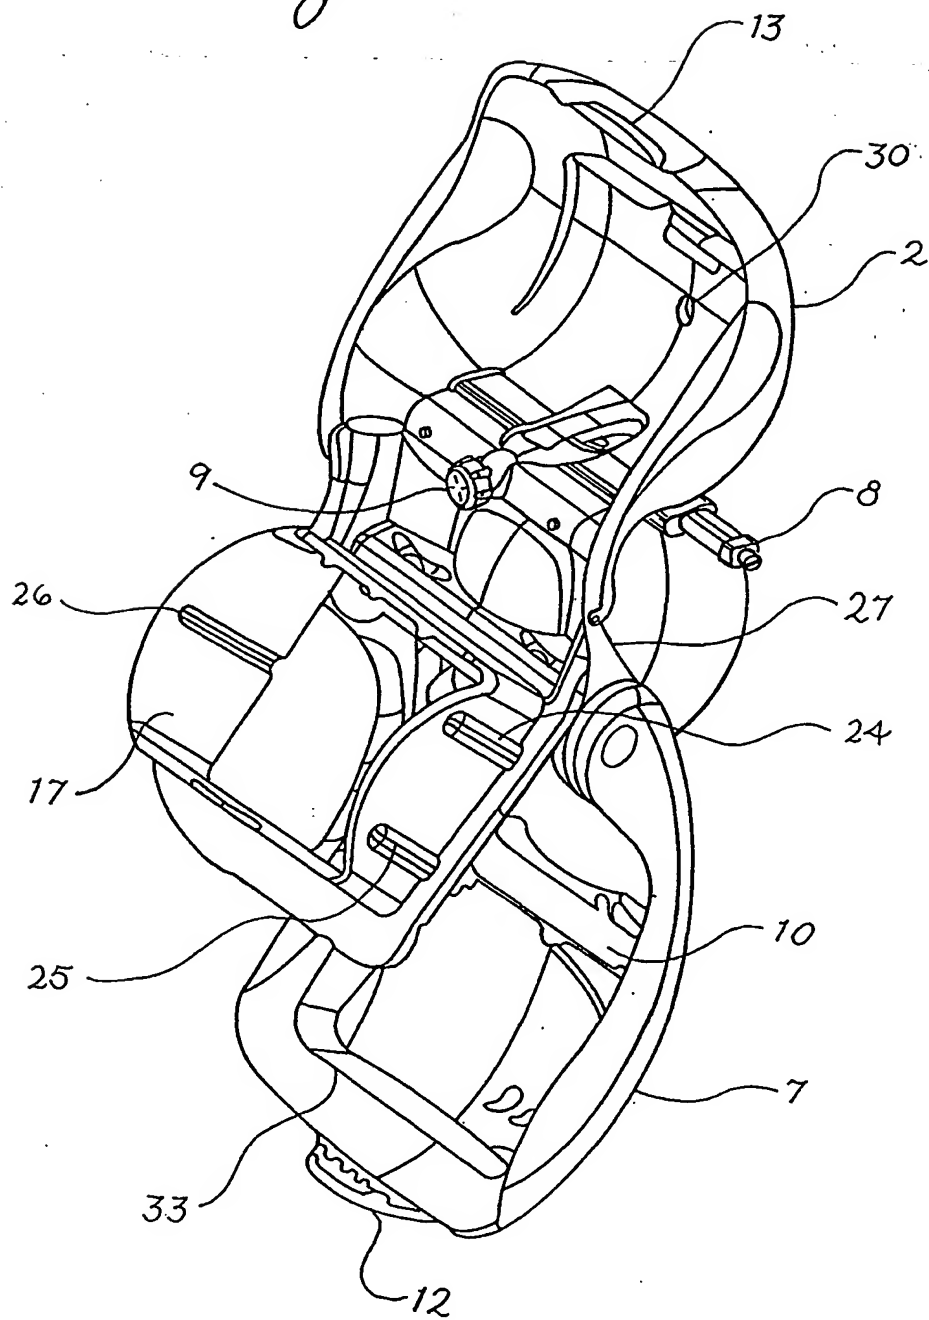


Fig 3

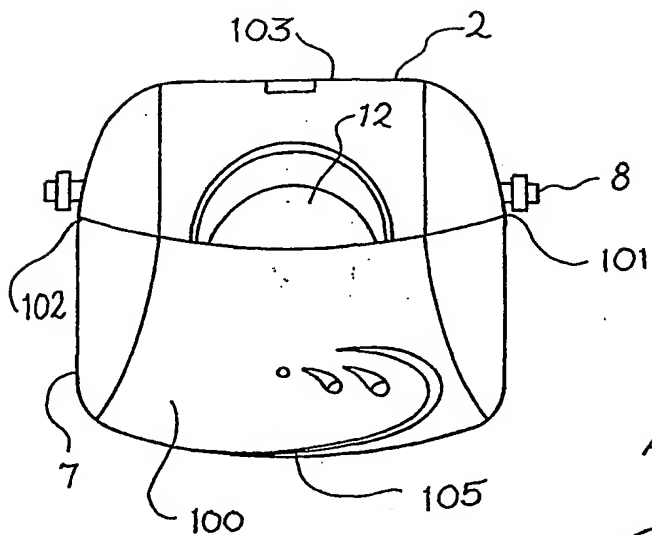


Fig. 4

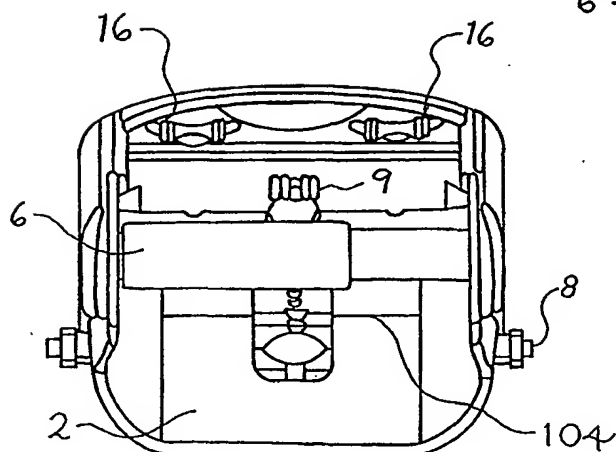
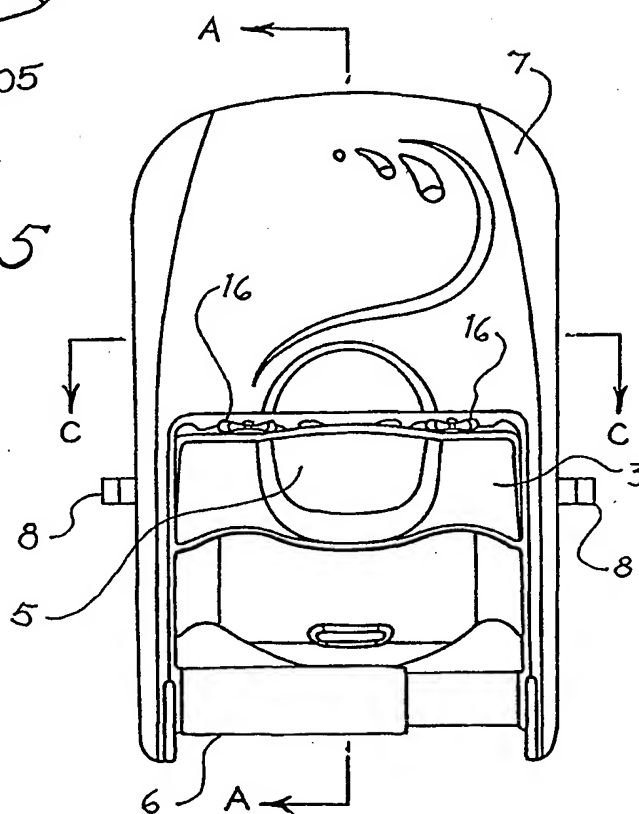


Fig. 6

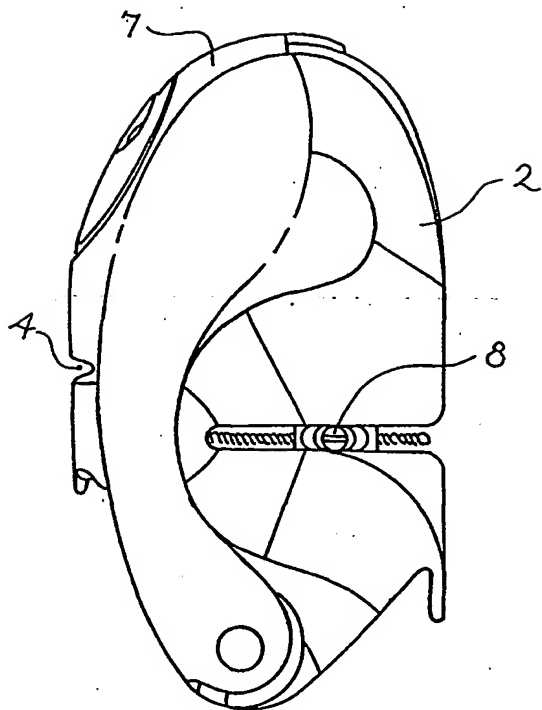


Fig. 7

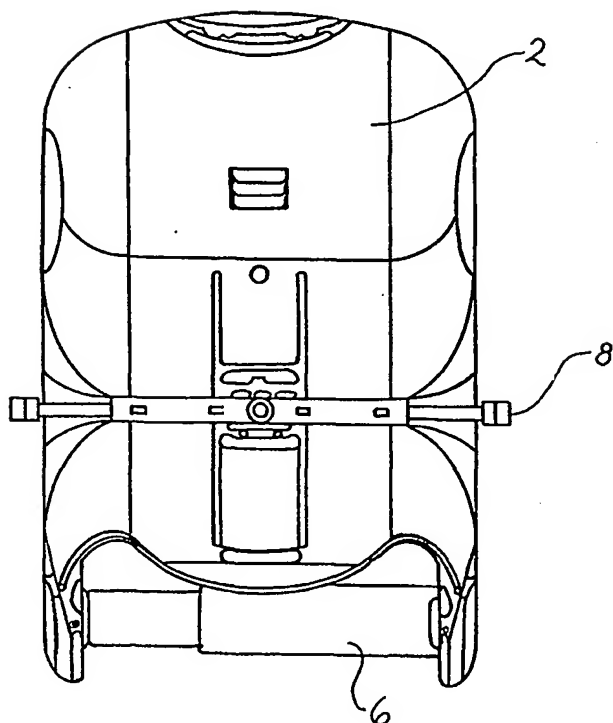


Fig. 8

Fig. 10

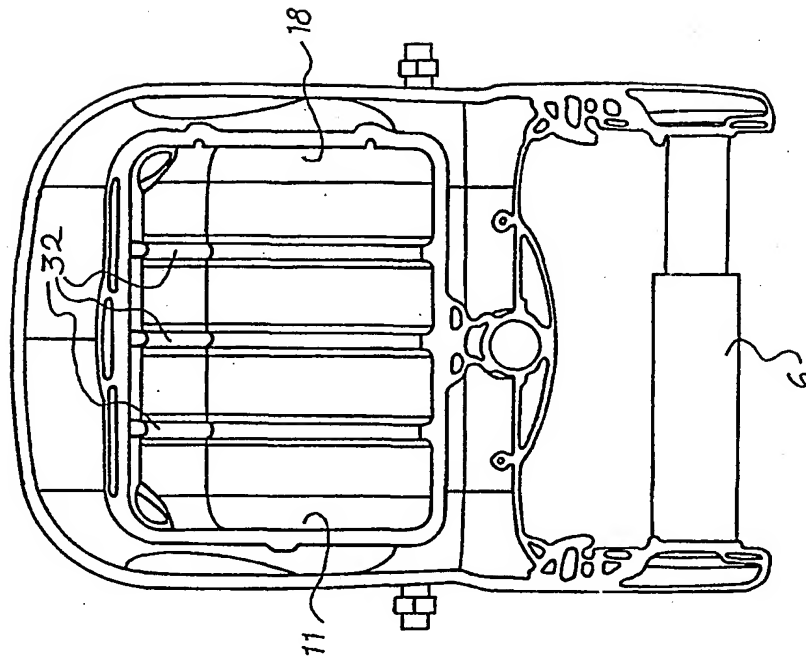


Fig. 9

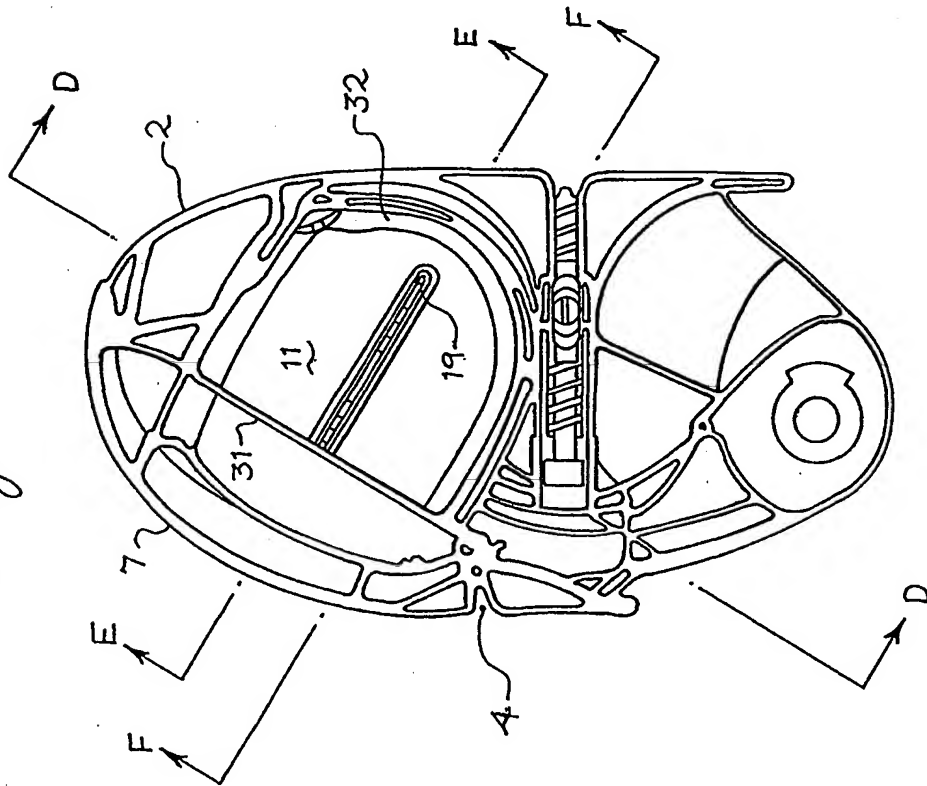


Fig. 11

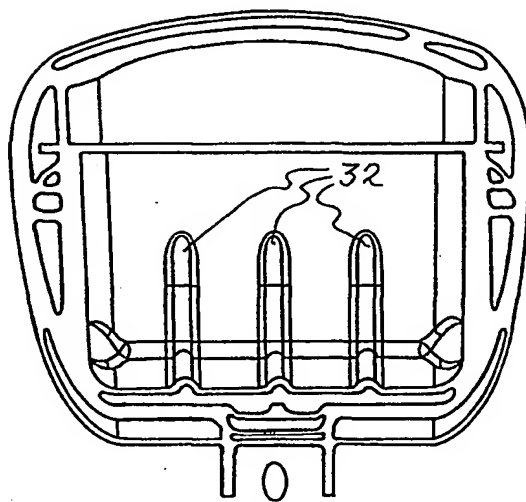
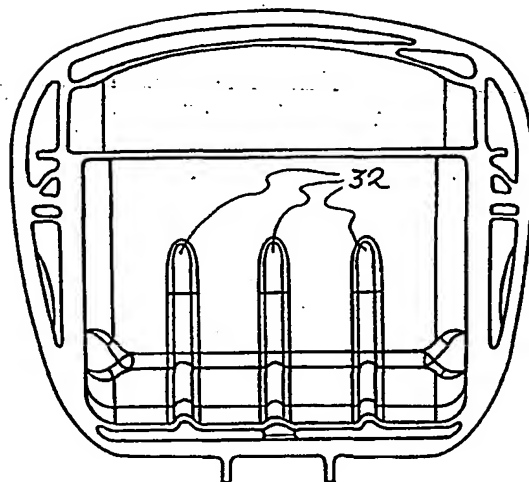


Fig. 12

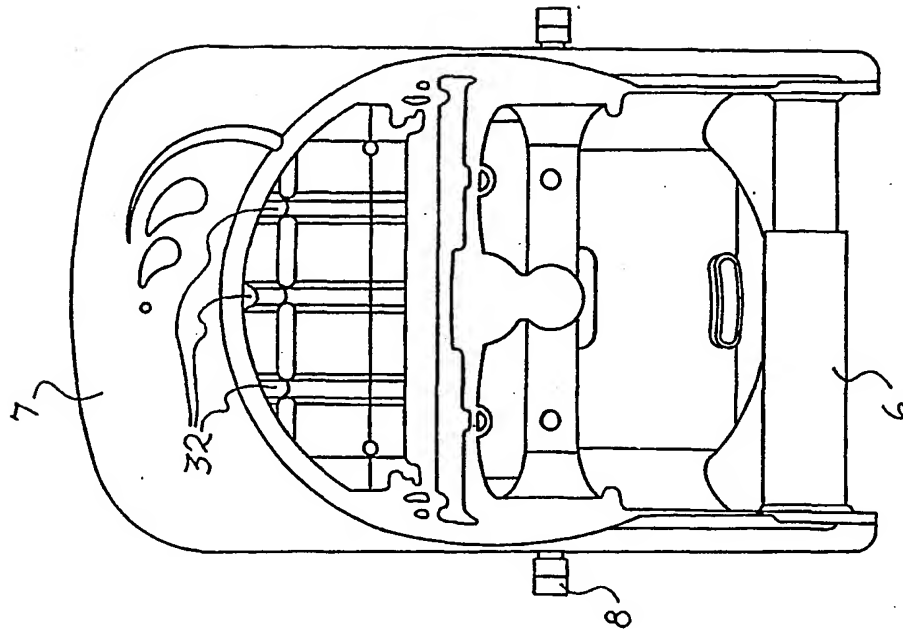


Fig. 14

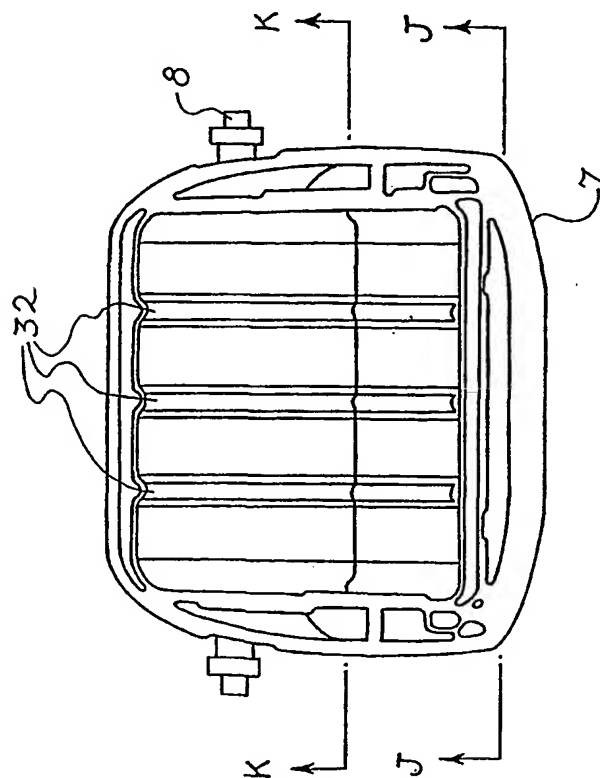
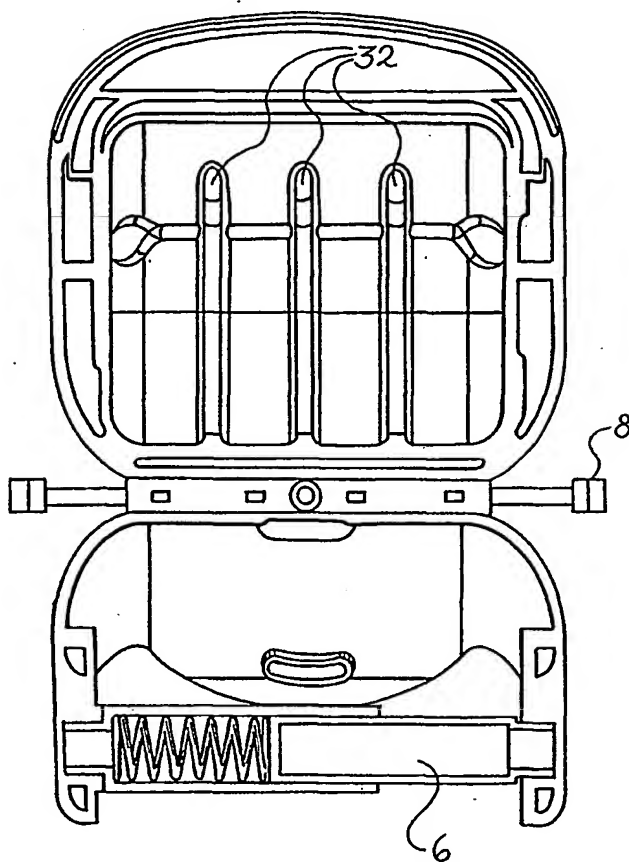
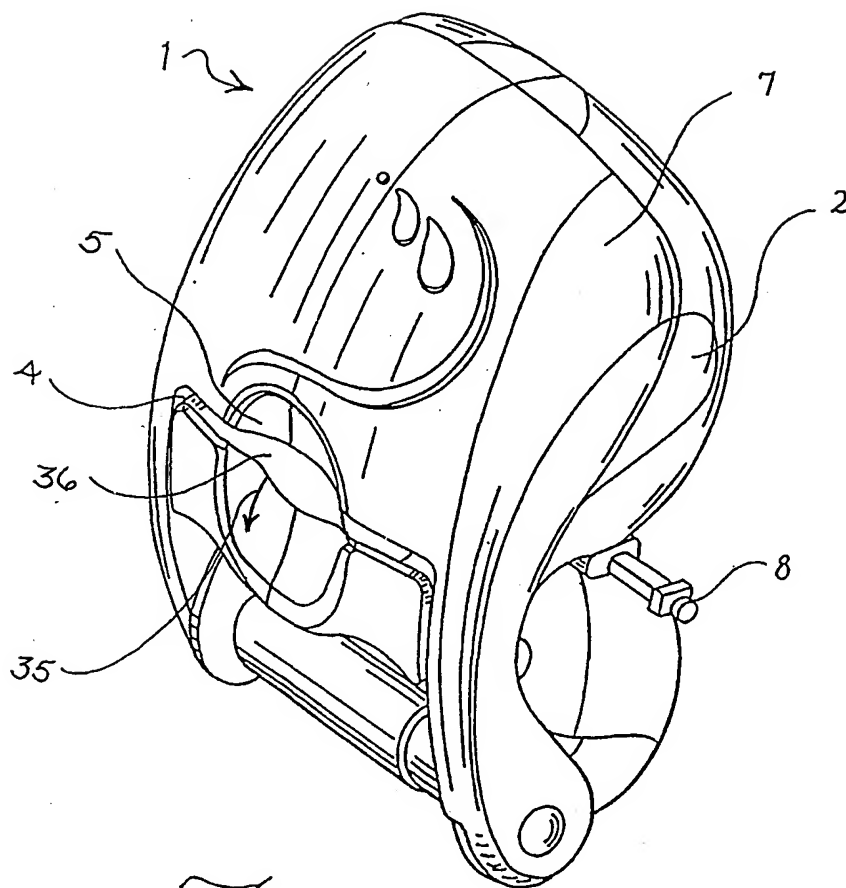
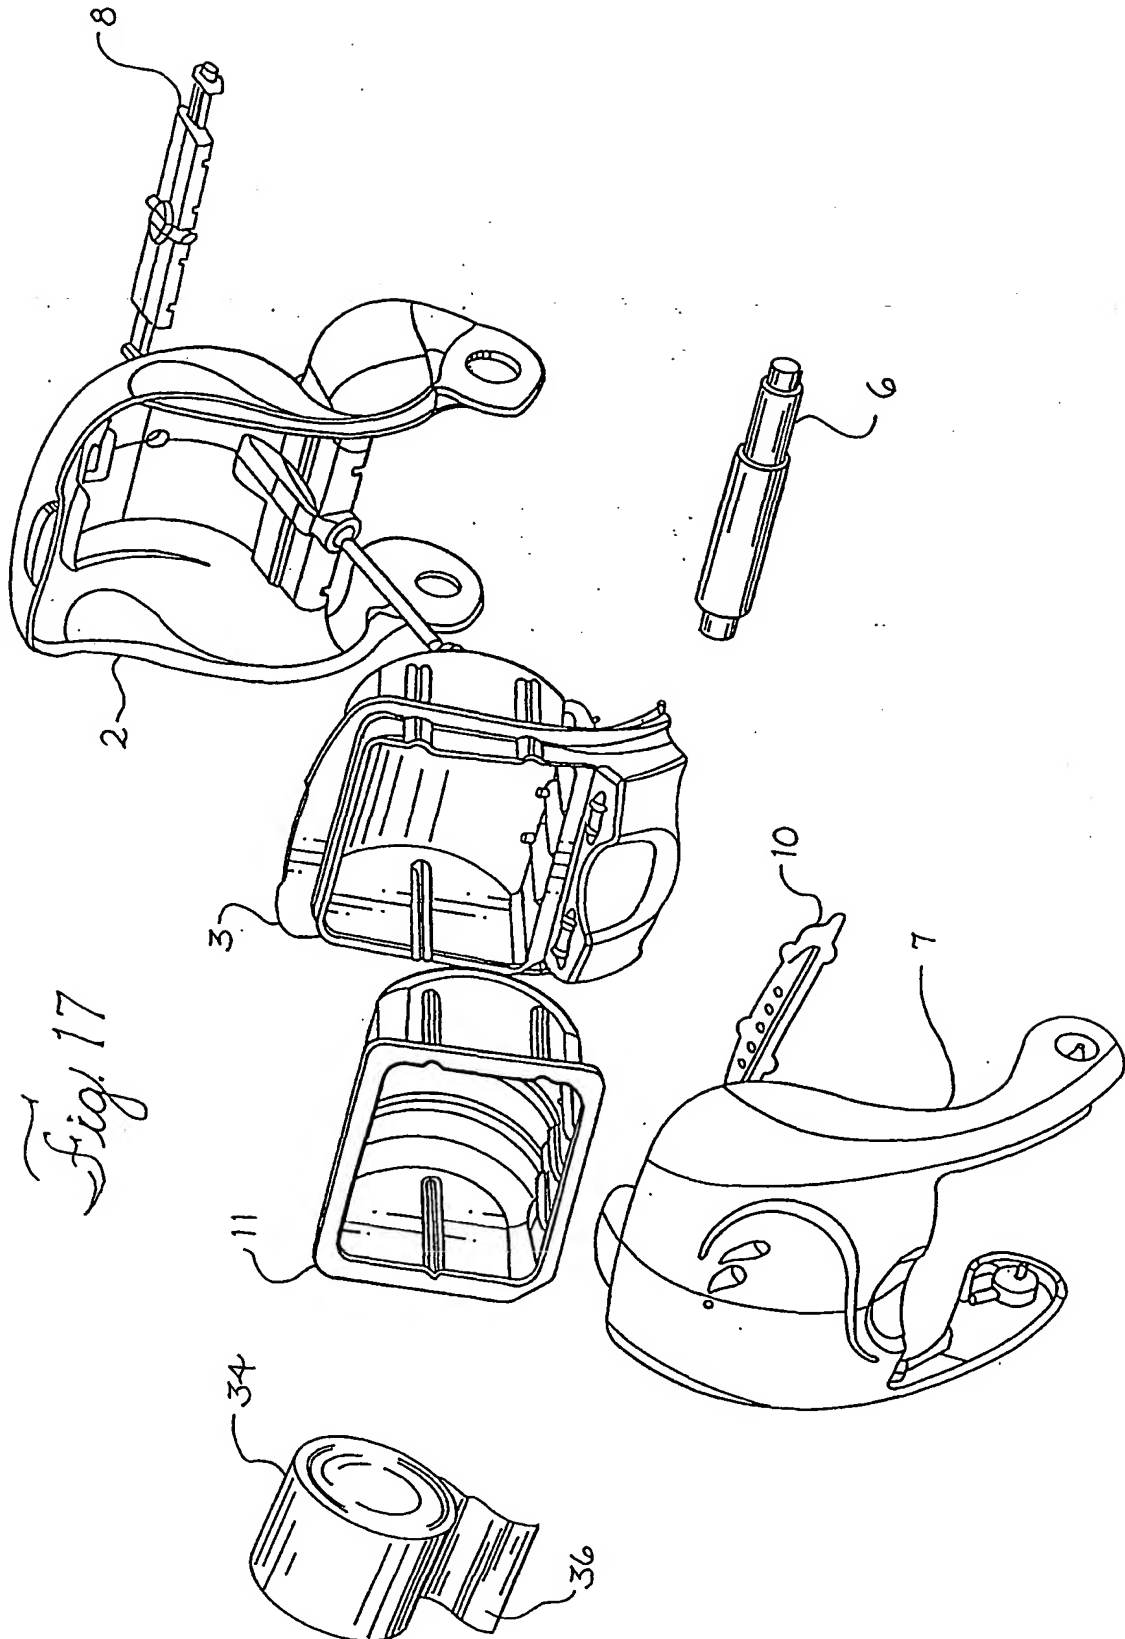


Fig. 13

Fig. 15

*Fig. 16*



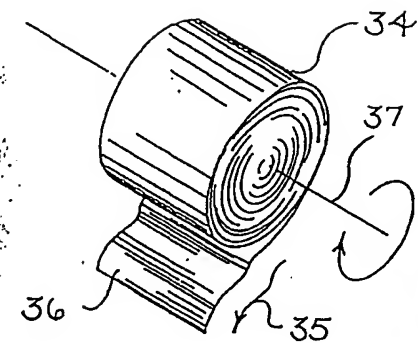


Fig. 18

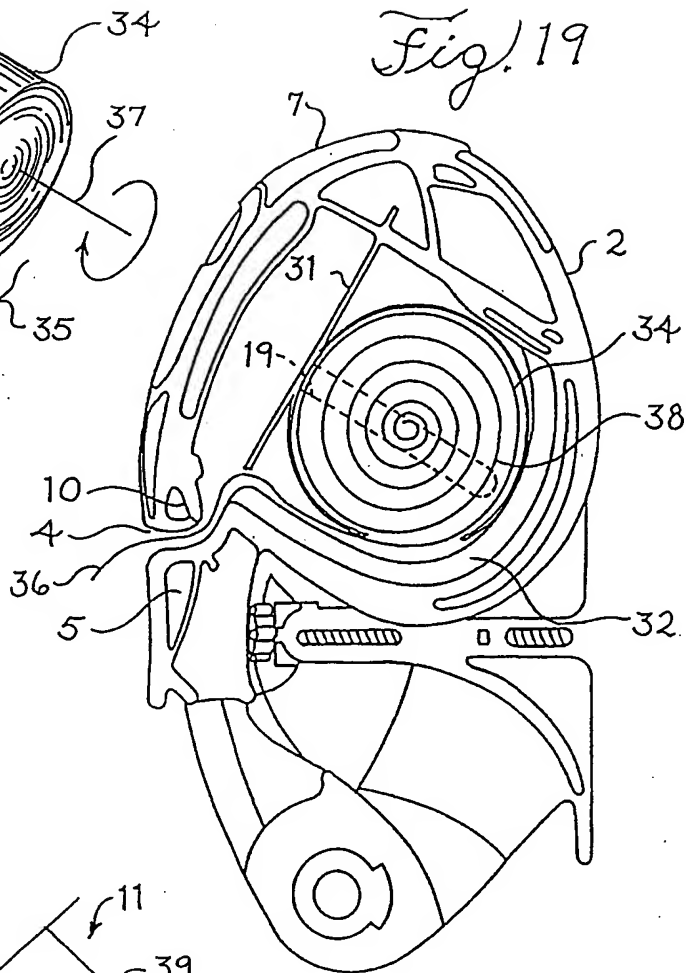


Fig. 19

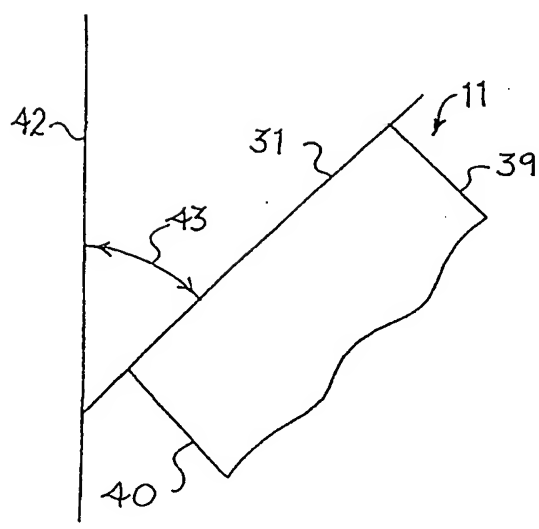
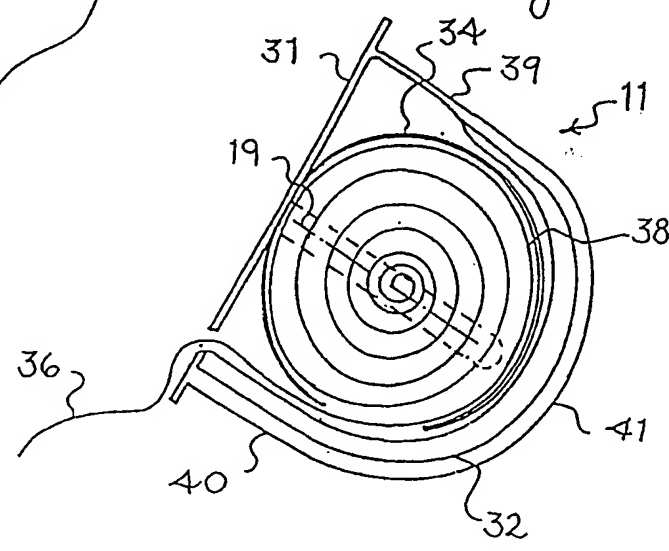


Fig. 20

Fig. 21



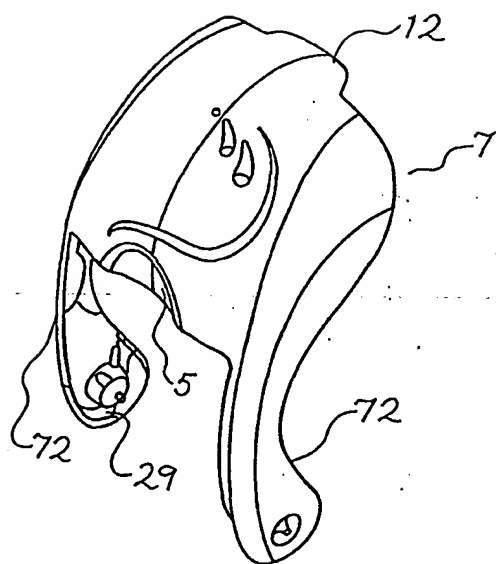


Fig. 22

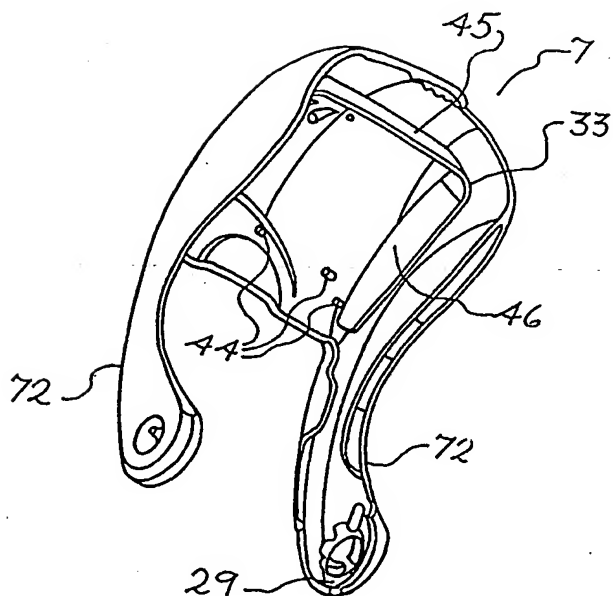


Fig. 24

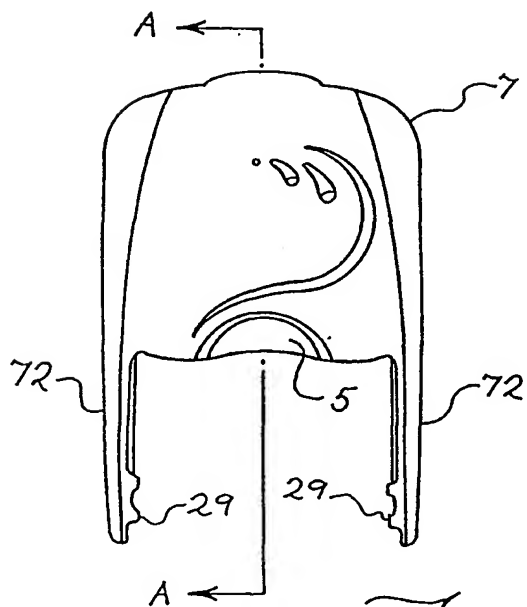


Fig. 23

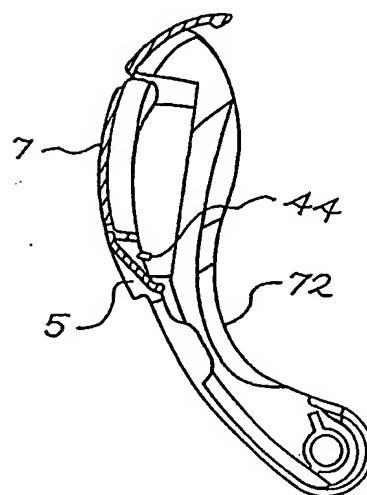
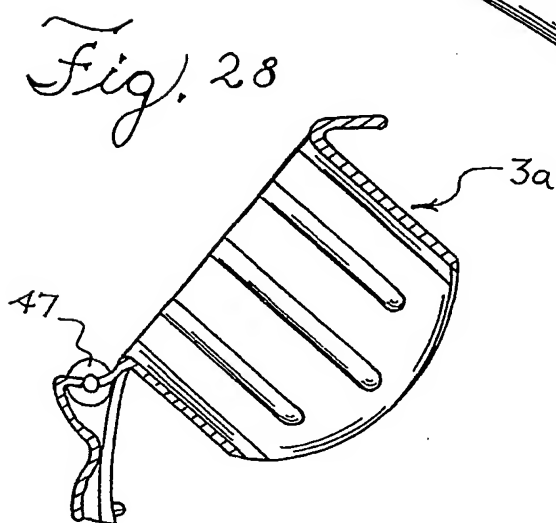
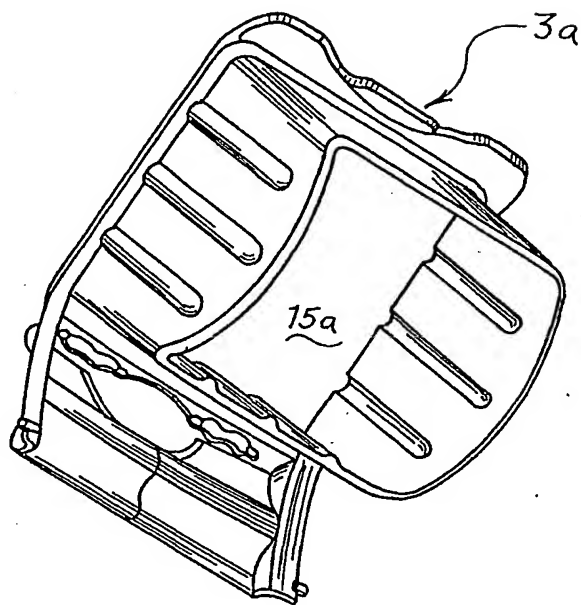
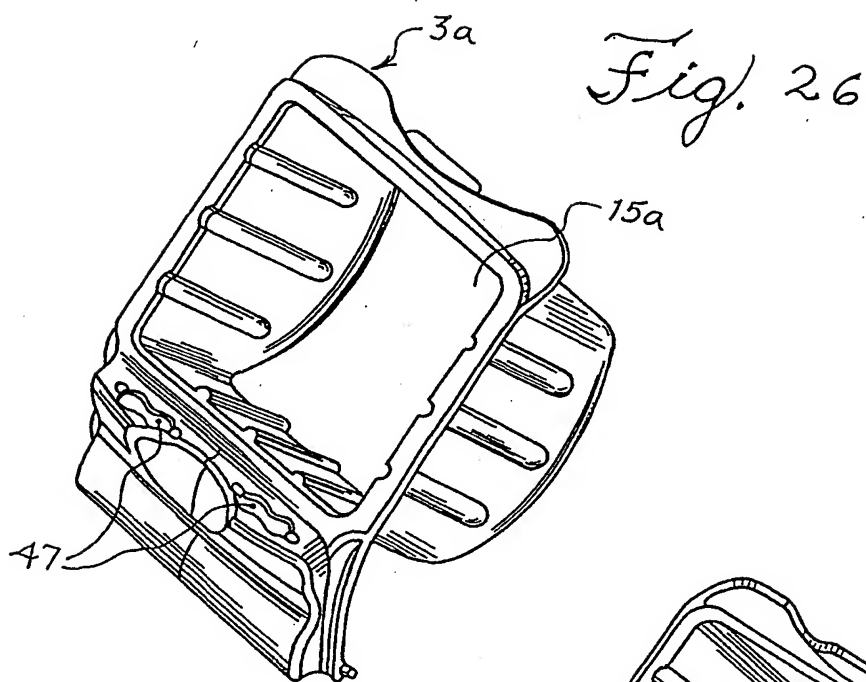


Fig. 25



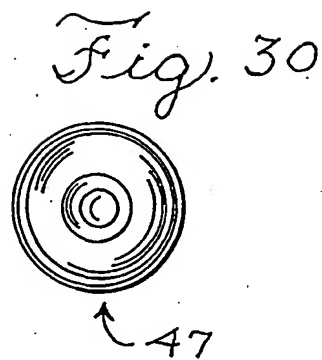
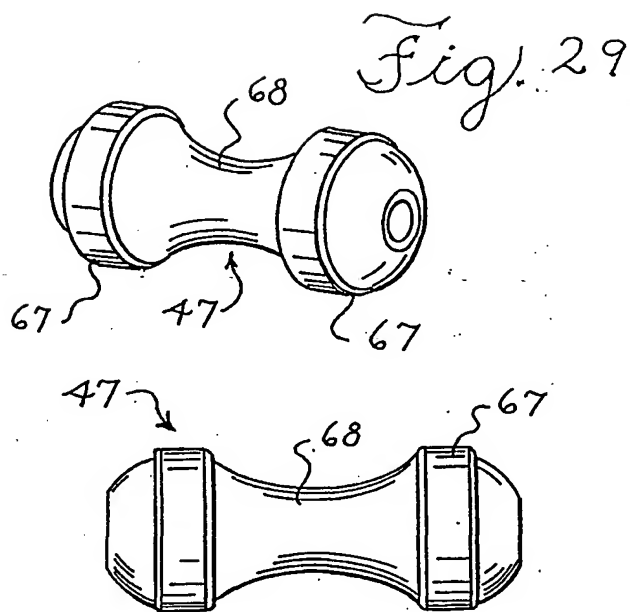


Fig. 31

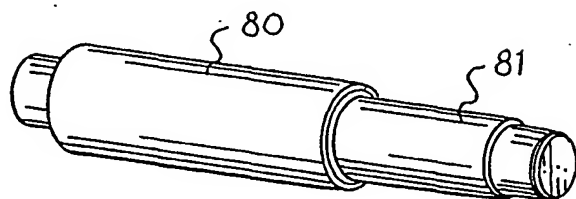


Fig. 40

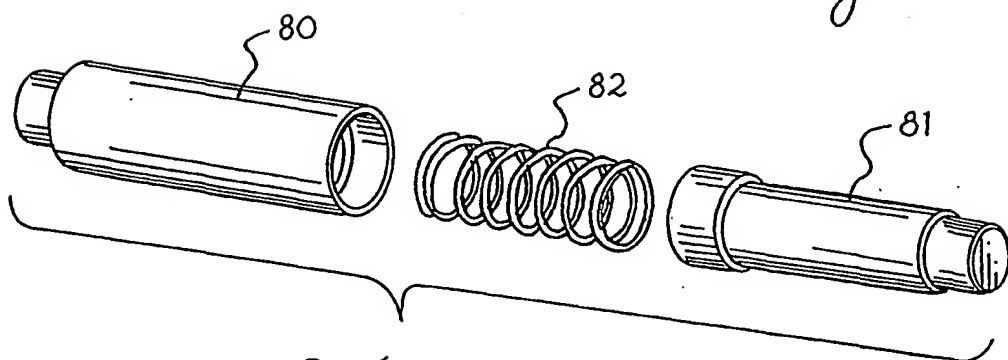


Fig. 41

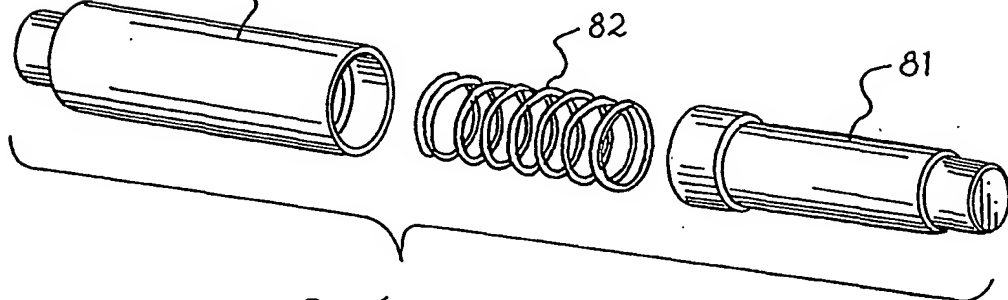




Fig. 34

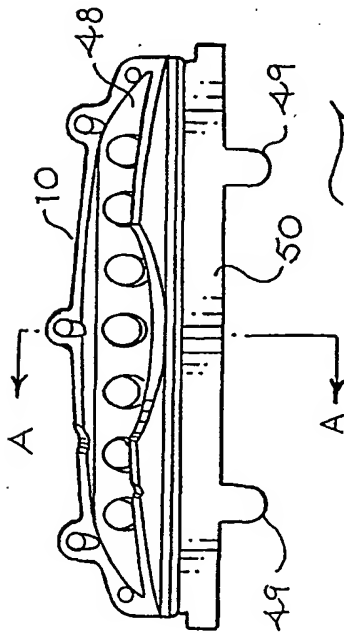


Fig. 32

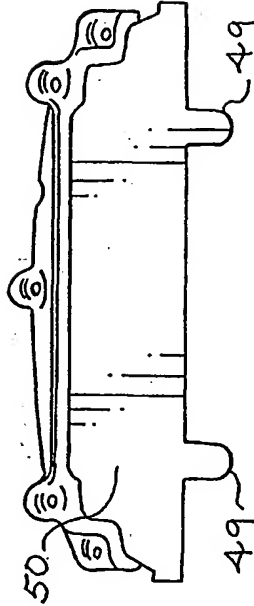


Fig. 33

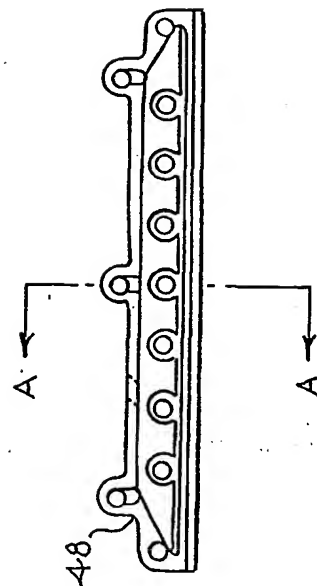


Fig. 35




Fig. 36




Fig. 37

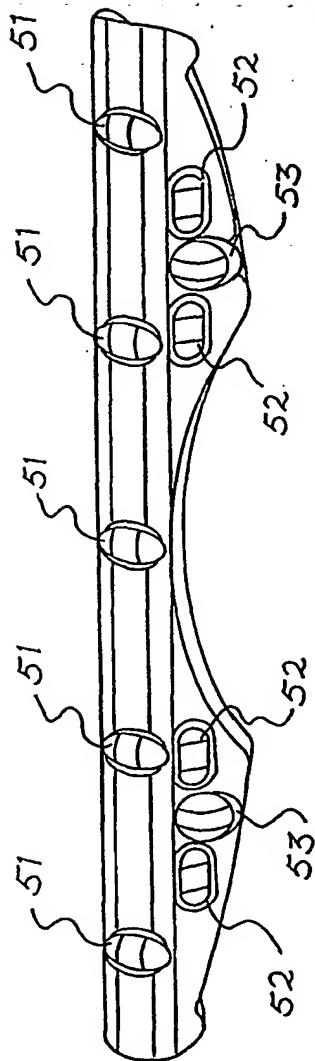


Fig. 38

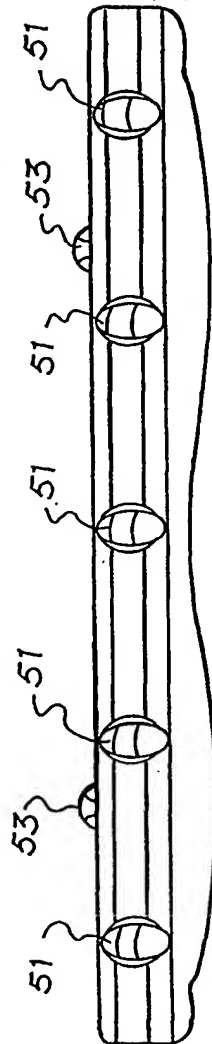


Fig. 39

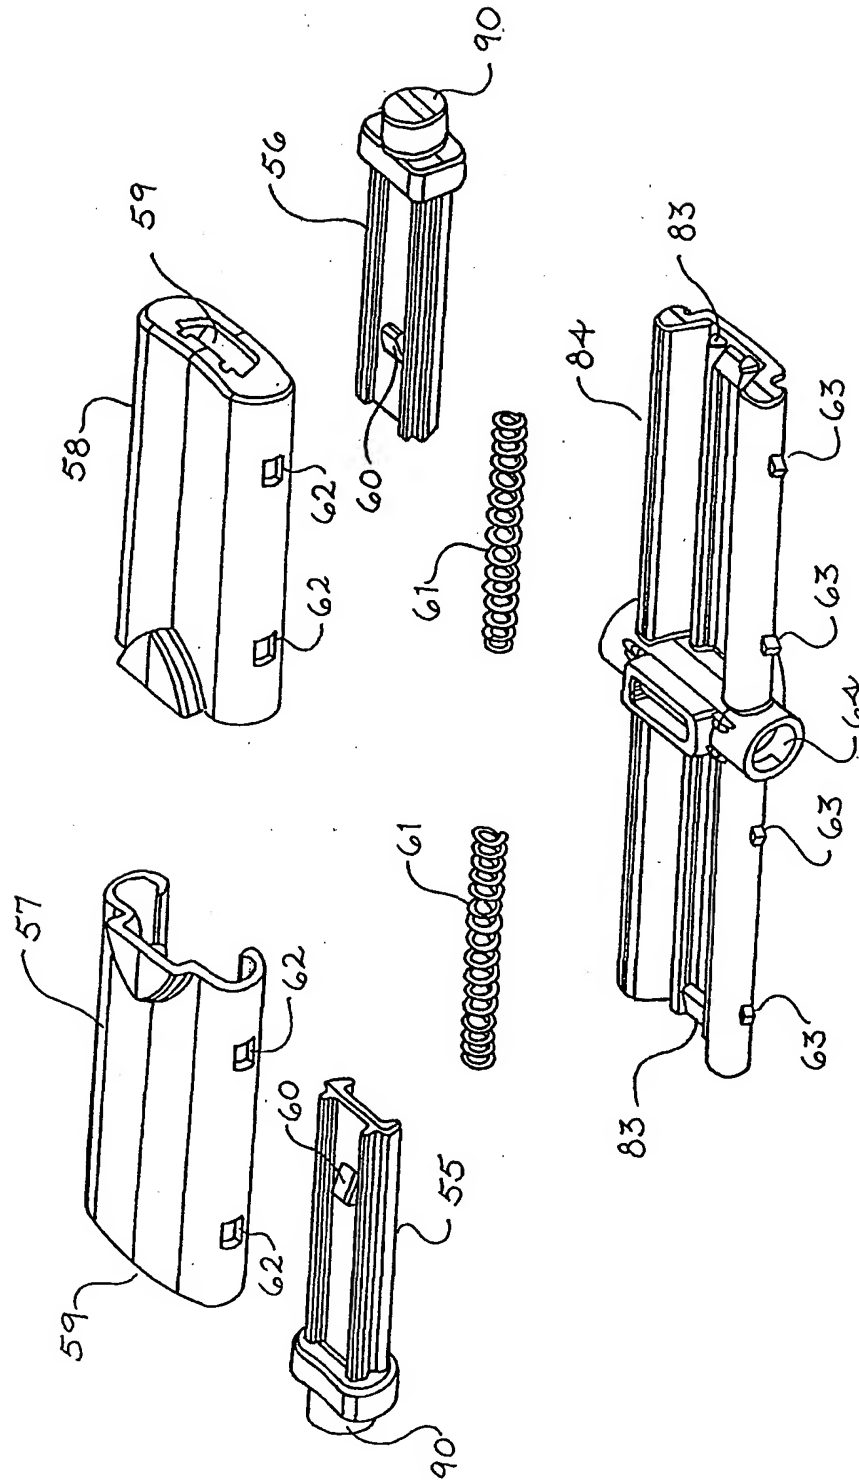


Fig. 43

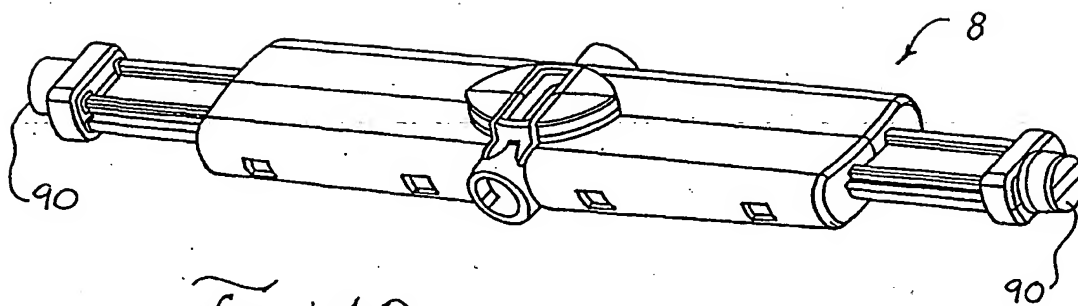


Fig. 42

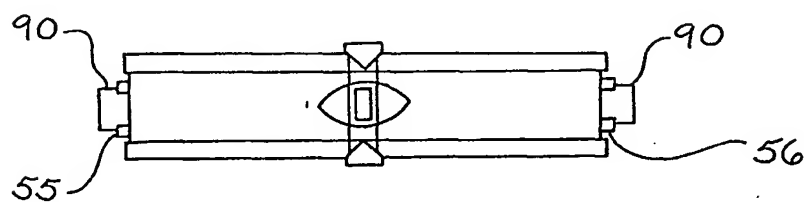


Fig. 44

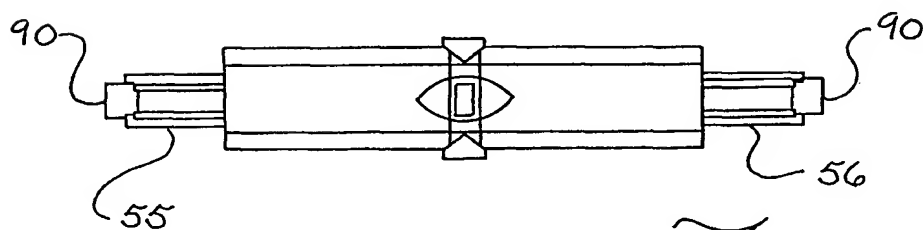


Fig. 45

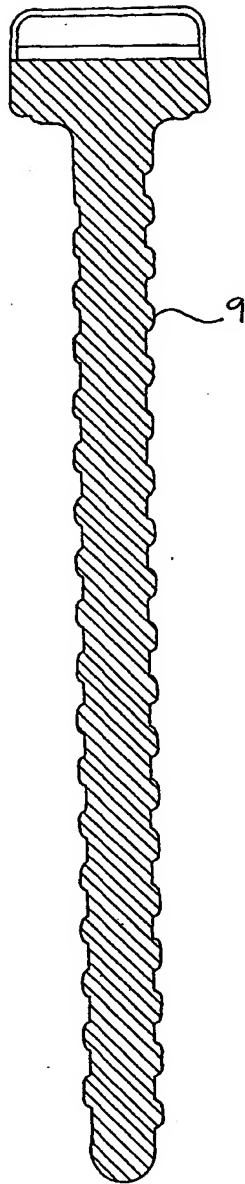


Fig. 46

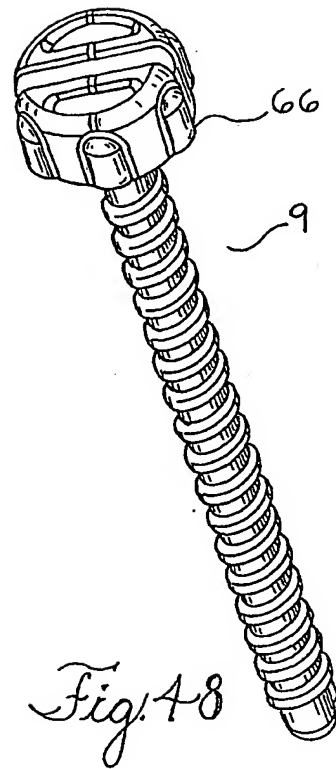
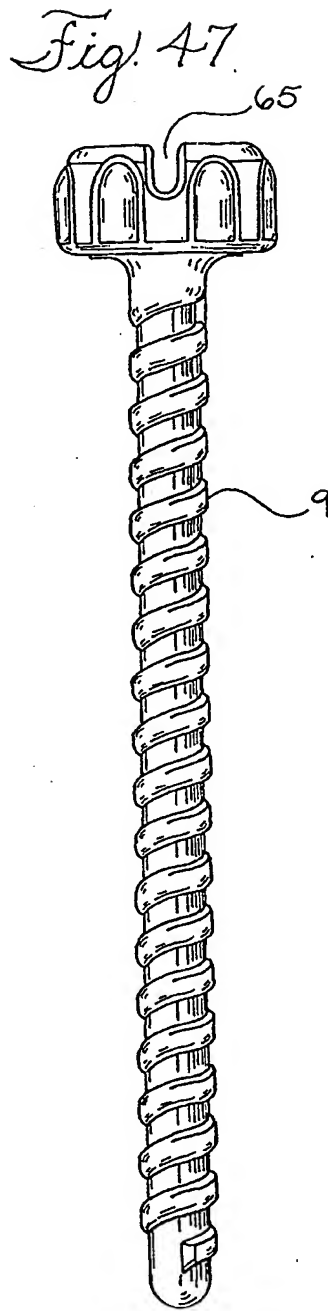


Fig. 48




Fig. 49

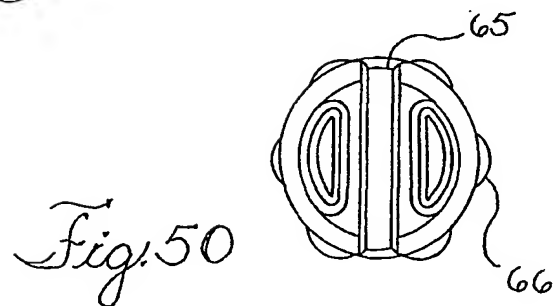
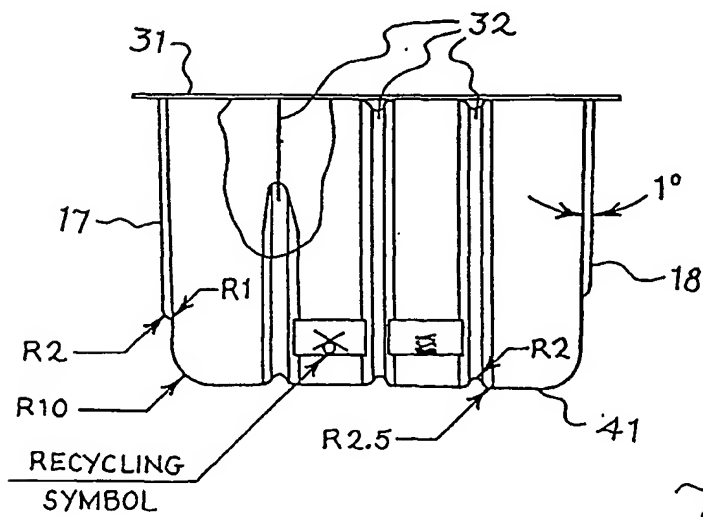
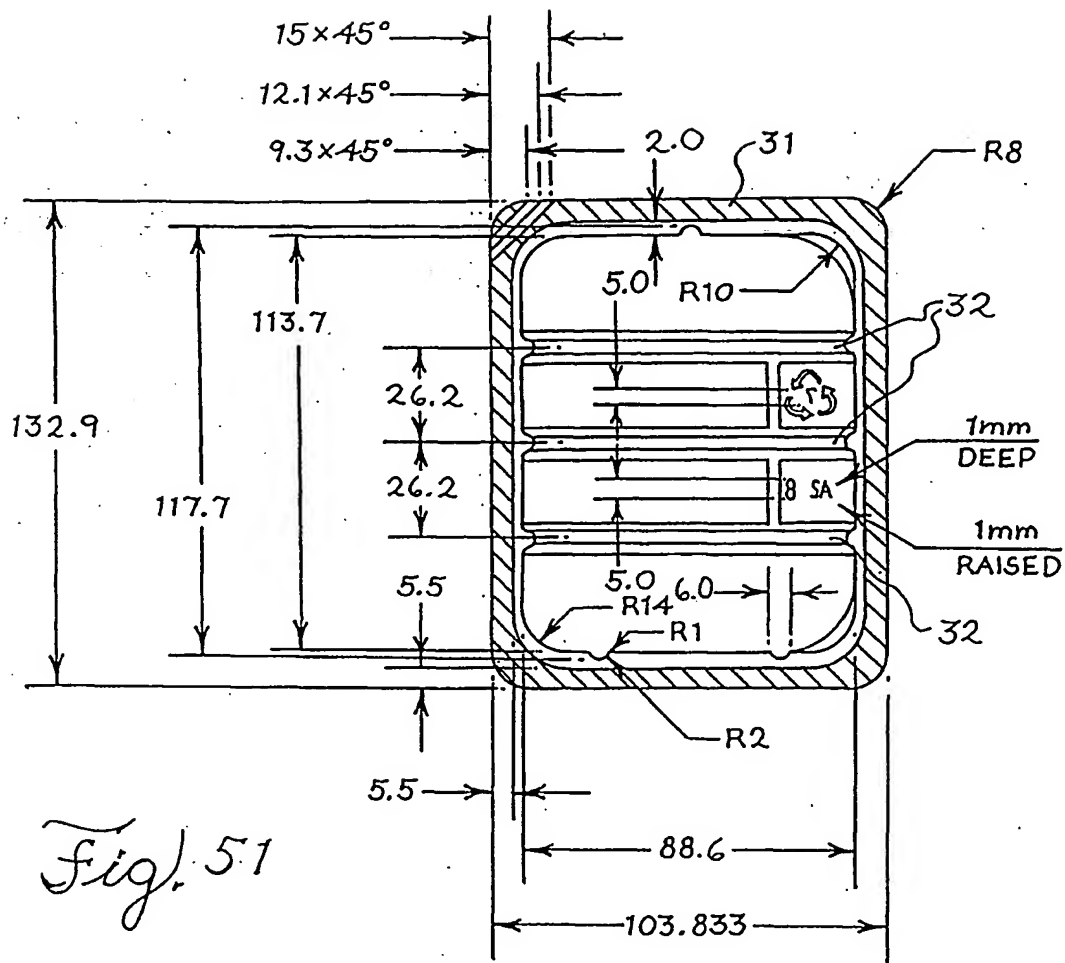


Fig. 50



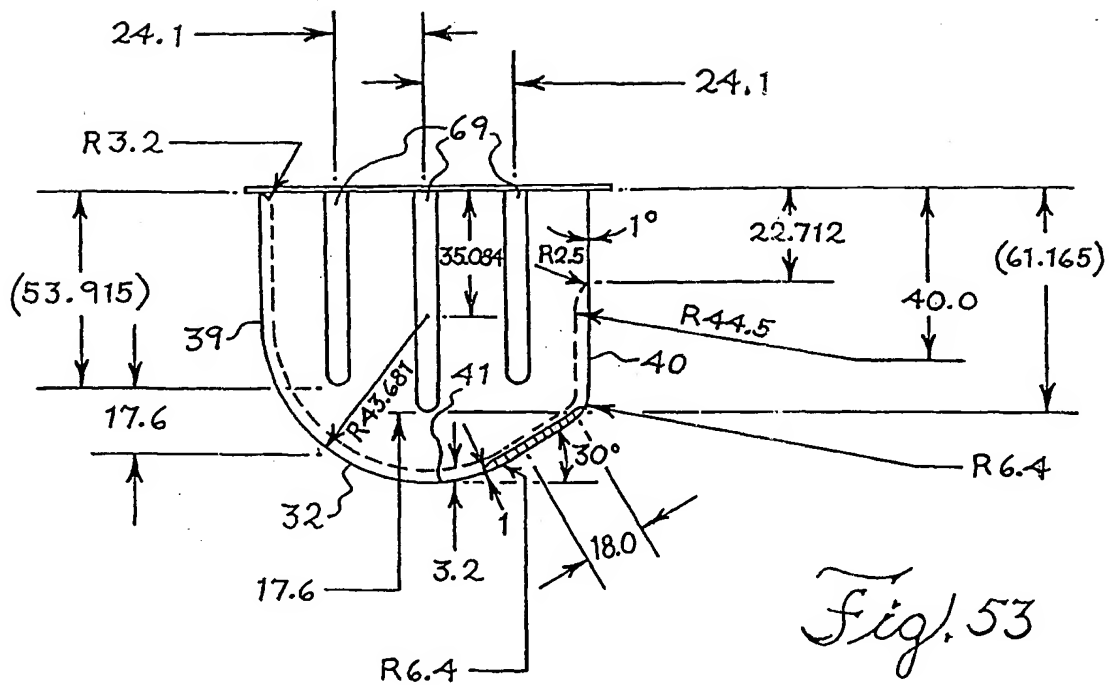


Fig. 53

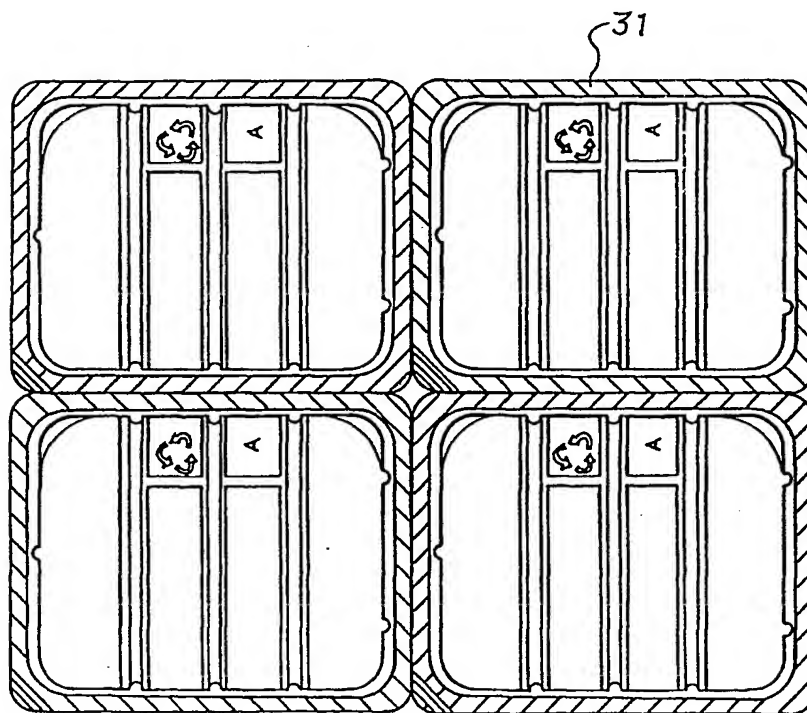


Fig. 54

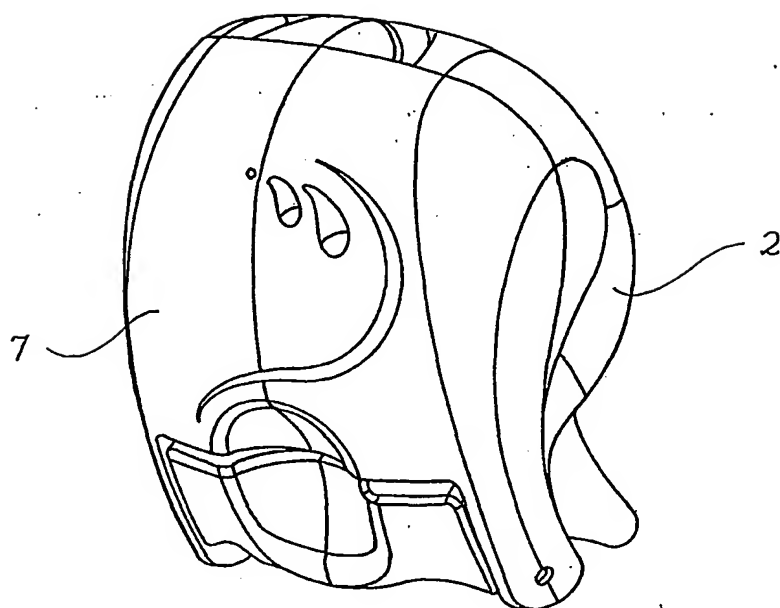
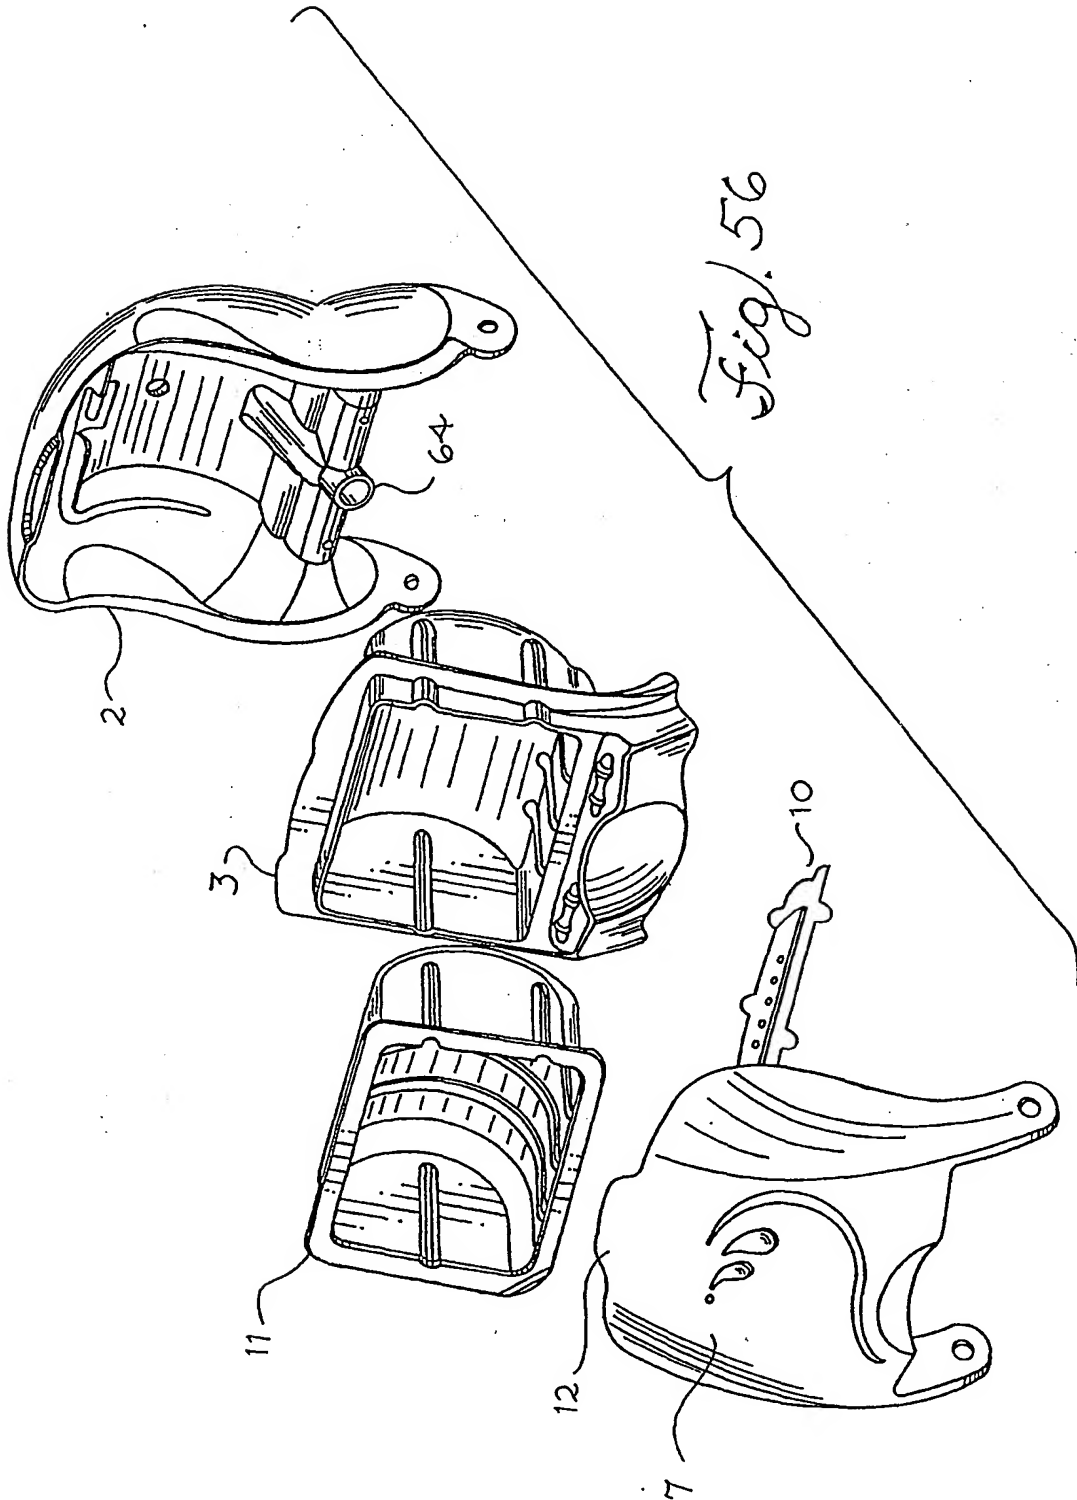
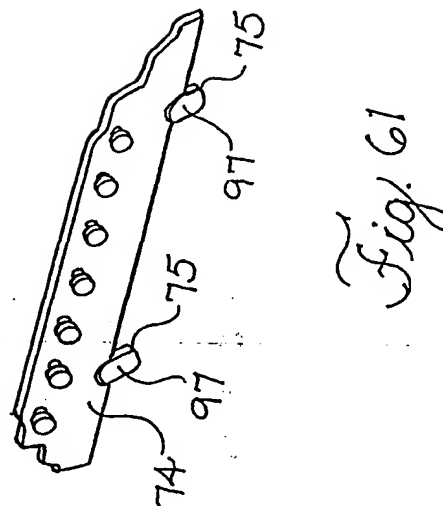
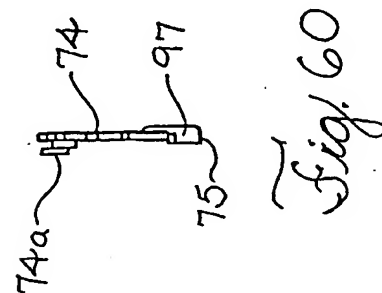
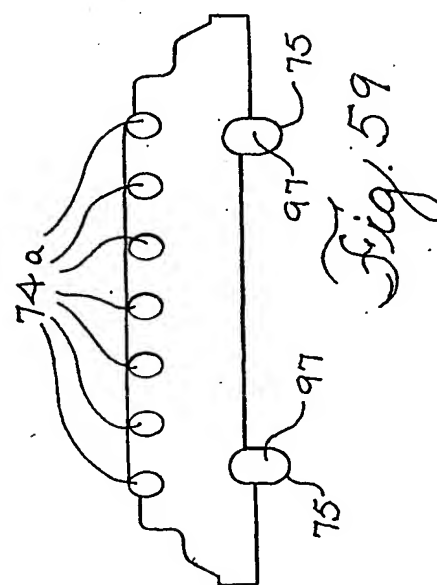
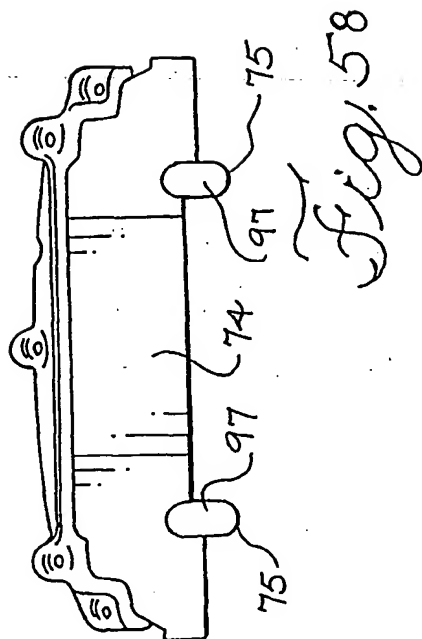
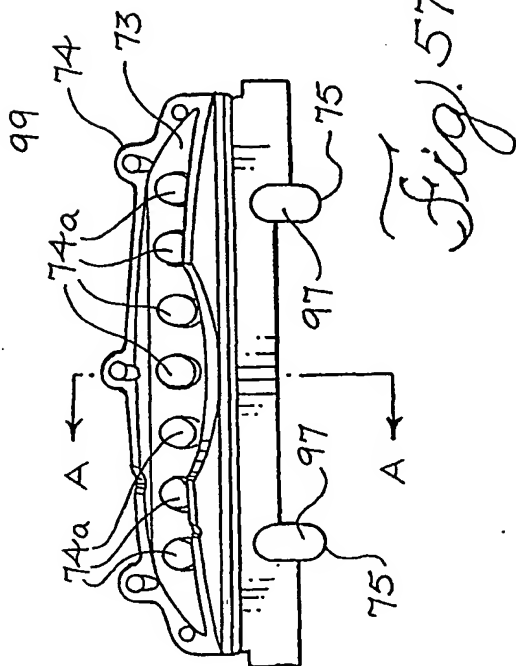


Fig. 55





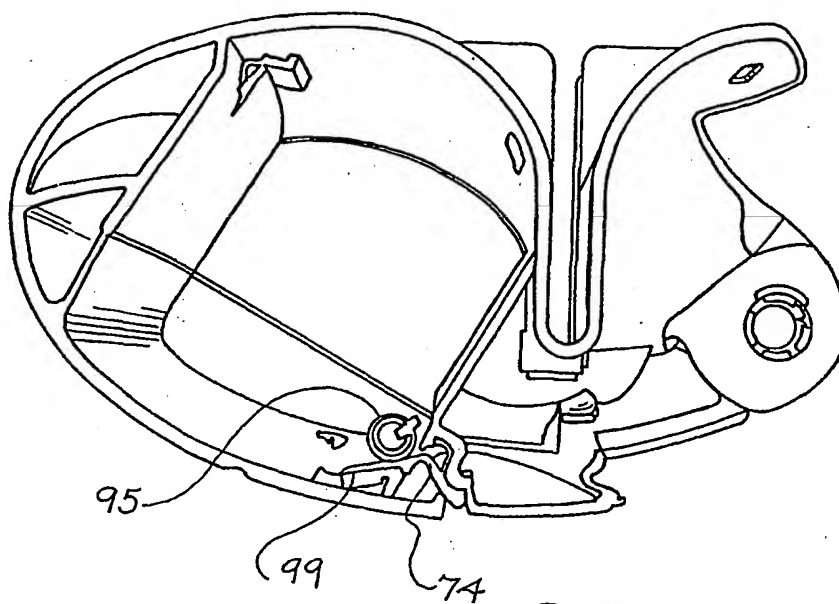


Fig. 62

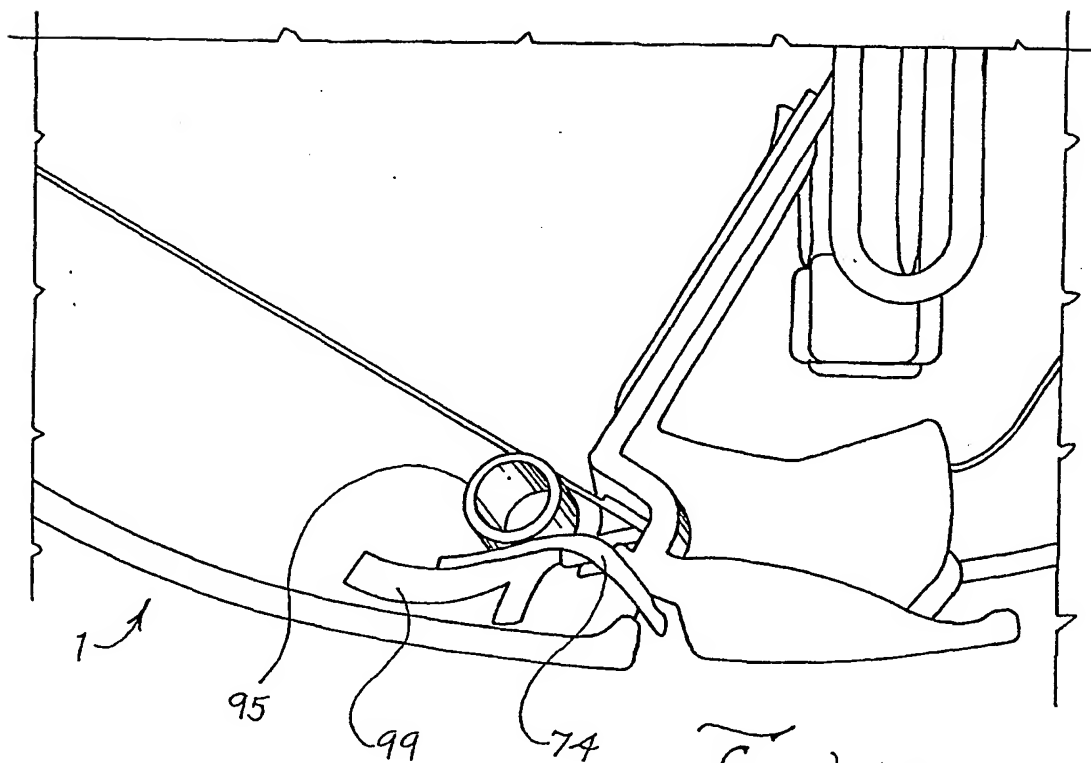
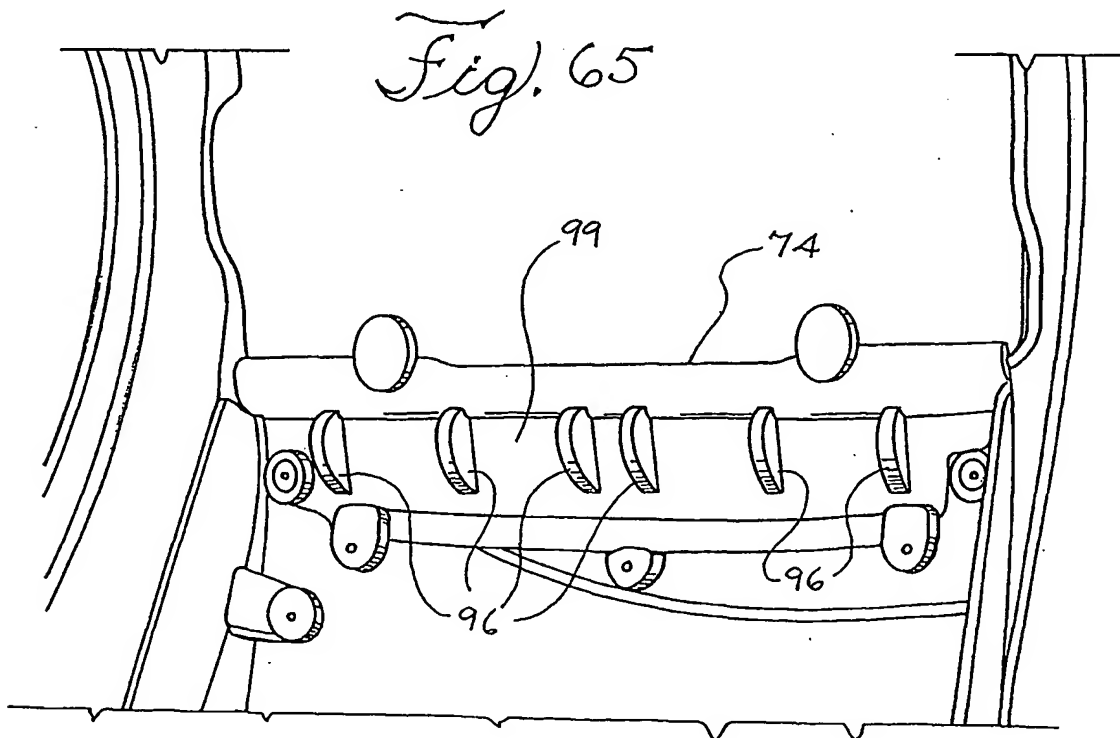
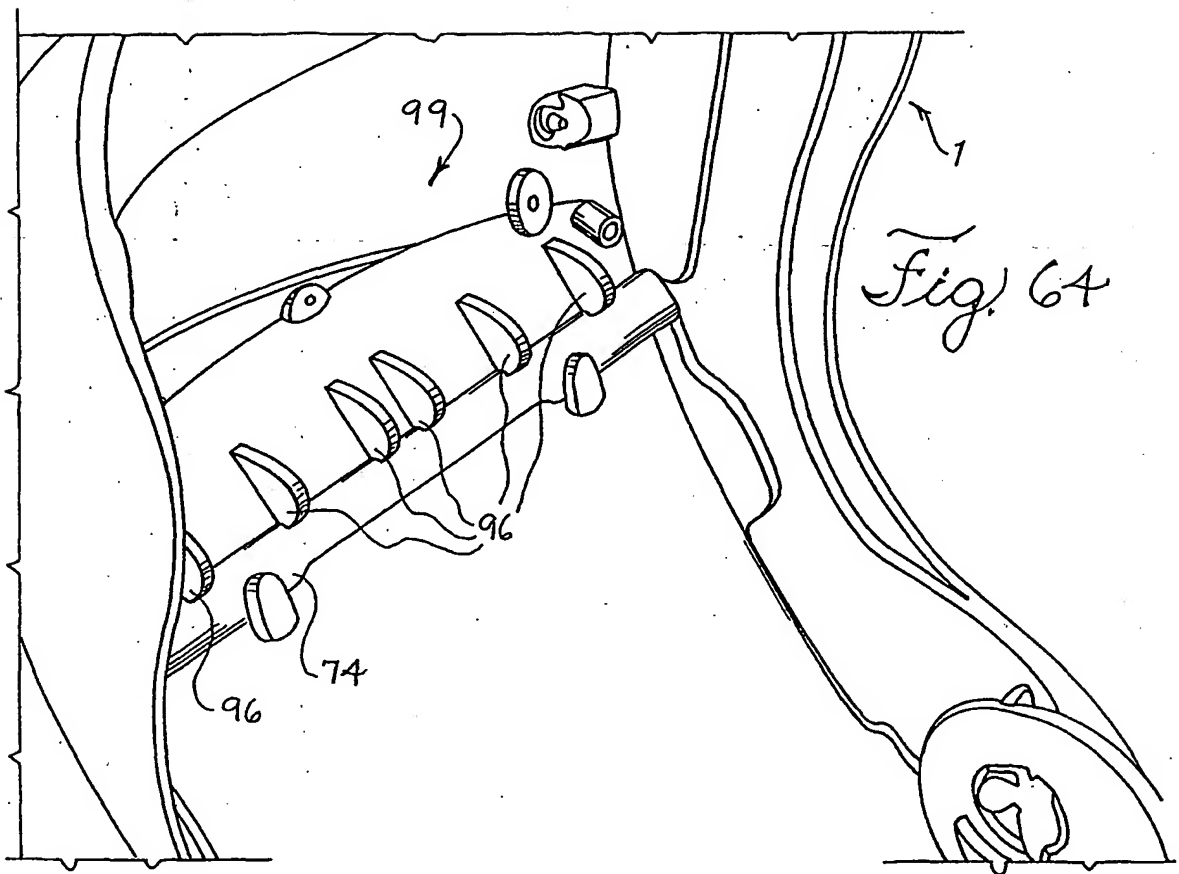


Fig. 63



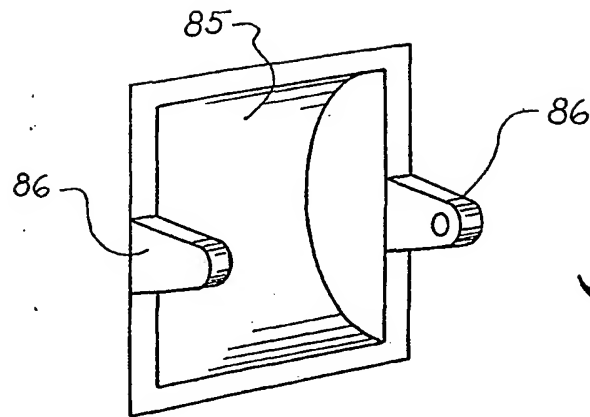


Fig. 66

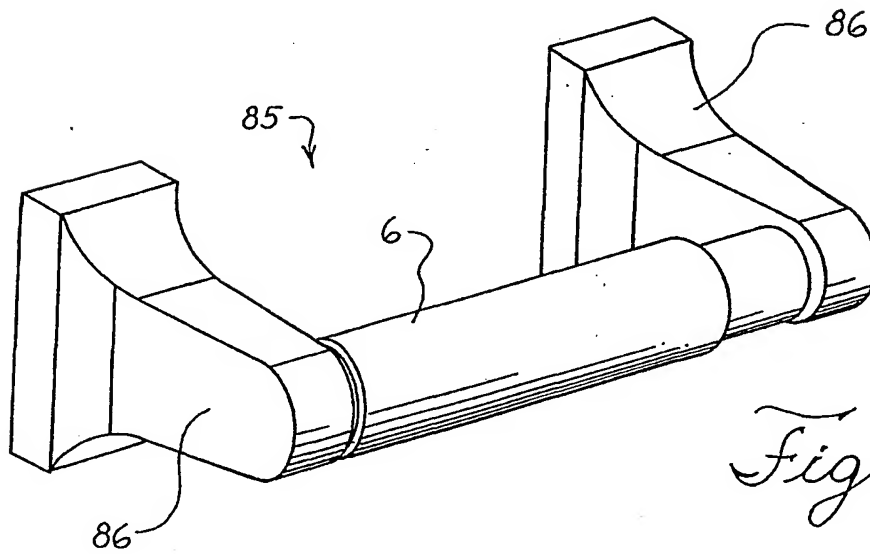


Fig. 67

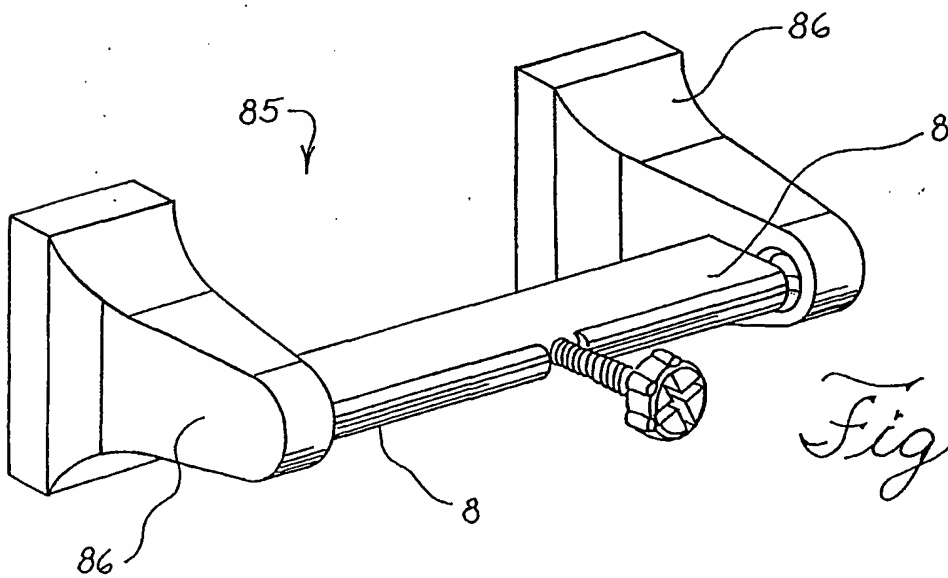


Fig. 68

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 01/11447

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A47K10/38 A47K10/42

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A47K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-------------------------------------|
| X | US 4 004 687 A (BOONE PHILIP) 25 January 1977 (1977-01-25) | 1-24, 26-38, 40-48, 50 |
| Y | the whole document | 39, 49 |
| X | US 4 106 617 A (BOONE PHILIP) 15 August 1978 (1978-08-15) the whole document | 51-53, 85, 86 |
| X | US 4 535 912 A (BONK JOSEPH P) 20 August 1985 (1985-08-20) | 54-62, 64-72, 74-76, 78-84 |
| Y | the whole document | 39, 49 |
| X | US 5 311 986 A (PUTZ JOAN M) 17 May 1994 (1994-05-17) the whole document | 87-91 |

☐ Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

12 July 2001

Date of mailing of the international search report

19/07/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Zuurveld, G

INTERNATIONAL SEARCH REPORT

Information on patent family members

In tional Application No

PCT/US 01/11447

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|----------------------------|---------------------|
| US 4004687 A | 25-01-1977 | US 3943859 A | 16-03-1976 |
| US 4106617 A | 15-08-1978 | NONE | |
| US 4535912 A | 20-08-1985 | US 3986479 A | 19-10-1976 |
| | | AT 341714 B | 27-02-1978 |
| | | AT 814674 A | 15-06-1977 |
| | | AU 7424974 A | 15-04-1976 |
| | | BE 820967 A | 03-02-1975 |
| | | BR 7408486 A | 04-11-1975 |
| | | CA 1035329 A | 25-07-1978 |
| | | DE 2448042 A | 17-04-1975 |
| | | DK 534274 A | 09-06-1975 |
| | | ES 223544 Y | 16-04-1977 |
| | | ES 224553 Y | 16-06-1977 |
| | | FR 2257253 A | 08-08-1975 |
| | | FR 2262505 A | 26-09-1975 |
| | | IE 41616 B | 13-02-1980 |
| | | IT 1021757 B | 20-02-1978 |
| | | JP 1156131 C | 15-07-1983 |
| | | JP 50078469 A | 26-06-1975 |
| | | JP 57049213 B | 20-10-1982 |
| | | NL 7413447 A | 15-04-1975 |
| | | NO 743647 A | 05-05-1975 |
| | | NZ 180744 A | 25-09-1978 |
| | | PH 14594 A | 02-10-1981 |
| | | SE 7412754 A | 14-04-1975 |
| | | US 4101026 A | 18-07-1978 |
| | | ZA 7406456 A | 26-05-1976 |
| US 5311986 A | 17-05-1994 | NONE | |